



**Features**

- Class 2
- 0-10V controlled power supply features eldoLED's LINEARdrive configurable 0-10V drivers
- Suitable For Damp Location
- 5 year Warranty



PLENUM FOR SUCH USE IN ACCORDANCE WITH UL2043

**Technical Information**

**Input voltage**

120-277V AC, 3.3A, 50/60Hz

**Output signal**

24 VDC, 3 x 4.0 A

**Maximum wattage**

3 x 96 watt circuits

**Mounting**

Surface mounted with conduit access

**Dimming curve**

Linear, 100% - 0% (HydraDrive)

**Dimming**


0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)

**Ambient Operating Temperature**


-20C to +35C

**Weight**

12.9 lbs

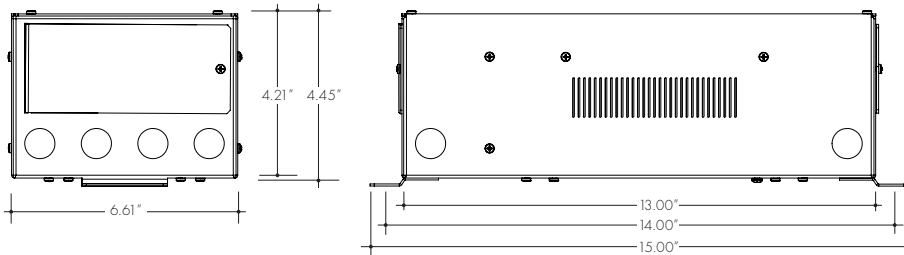

**Wiring Diagram**

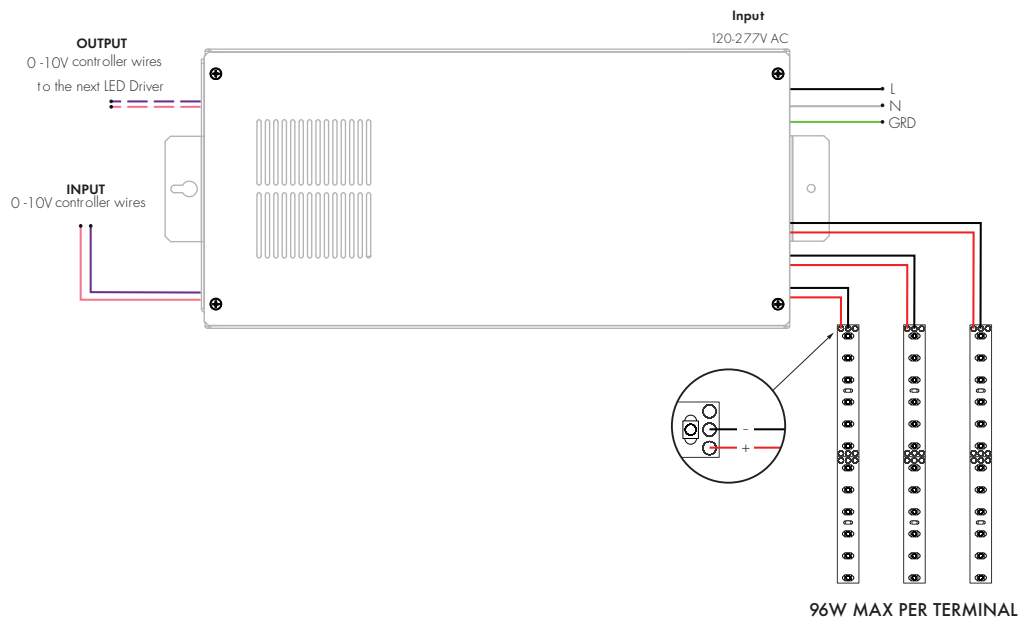

**Ordering Code**

