

ARTEMIS 3 W

RECESSED WALL WASHING LED DOWNLIGHT



Artemis 3 W - Recessed Wall Washing LED Downlight. Artemis 3 W features a SENSO-designed reflector and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

| | | | | | | | | | |
|---------|-------------|-------------|----|---|---|----|----|----|---|
| Fixture | AR3W | | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Driver | | AR3W | -- | | | -- | -- | -- | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | |

Product Specifications

SAMPLE: Fixture **AR3W - TL - A90 - -- - 25 - 10 - DL - 02 - 08** | Driver **910 - AR3W - TL - STD - 120 - A90 - 07 - 08**

| 1 - Model | 2 - Trim | 3 - LED | 4 - Optic | 5 - CCT | 6 - Lumen | 7 - Accessory | 8 - Trim Color |
|--------------------------------------|---|-------------------------------|------------------|--|---|----------------------------|--|
| AR3W · Artemis 3 Wall Washing | FL · Flanged TL · Trimless | A90 · 93+ CRI Accuracy | 618 · 18° | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 10 · 1000 (9.1W) 15 · 1500 (14W) 20 · 2000 (19.8W) 30 · 3000 (31.8W) | DL · Diffusing Lens | 01 · White 02 · Black 08 · Silver XX · Custom |

| 9 - Baffle Color | 1 - Housing Style | 2 - Model | 3 - Trim | 4 - Driver | Dim Level | Dim Level |
|--|--|-----------------|-----------------|---|----------------------------------|--|
| 01 · White 02 · Black 08 · Silver XX · Custom | 910 · Remote 915 · New Construction 920 · IC Housing ^{*1/7} 930 · Chicago Plenum ^{*1/7} | Same as Fixture | Same as Fixture | STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{*2/3} ELDOLC · EldoLED 0 - 10 Volt DALI · Dali Protocol | N/A 1% 10% 0.1% 0.1% | LUTES · Hilume Ecodigital 1% LUT2W · 2 Wire for phase ^{*3} 1% DMX · SENSO ^{*4} EMG · Emergency Driver ^{*4/5} CSMB · Casambi Wireless Control ^{*4/5} |

| 5 - Voltage | 6 - LED | 7 - Lumen | 8 - Baffle Color ^{*6} |
|---|-----------------|-----------------|--------------------------------|
| 120 · 120V 277 · 277V 347 · 347V | Same as Fixture | Same as Fixture | Same as Fixture |

*1 Cannot exceed 1500lm
*2 Not available in 3000lm
*3 Not available in 277V
*4 Requires remote housing
*5 Specified separately
*6 Only needed for Trimless
*7 JAB Compliant

Project : _____
Quantity : _____
Type : _____
Notes : _____

ARTEMIS 3 W

RECESSED WALL WASHING LED DOWNLIGHT



LED Module Performance

- Output:** up to 3000lm
- High Efficacy:** up to 101 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & R9 Value of 50+


Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations

| Lumen Option | 1000lm | 1500lm | 2000lm | 3000lm |
|-----------------|--------|--------|--------|--------|
| Fixture Wattage | 9.1W | 14W | 19.8W | 31.8W |
| Delivered Lumen | 913lm | 1421lm | 2001lm | 2910lm |

Reflector

Faceted Reflector

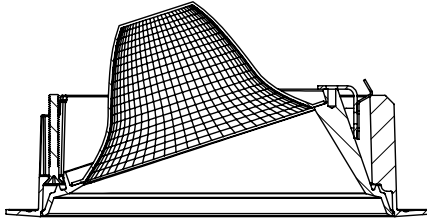


Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- Easy installation with spring loaded tabs
- 18° tilt angle

Construction / Finish

- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Rated for damp locations
- Made in Canada

Dimensions


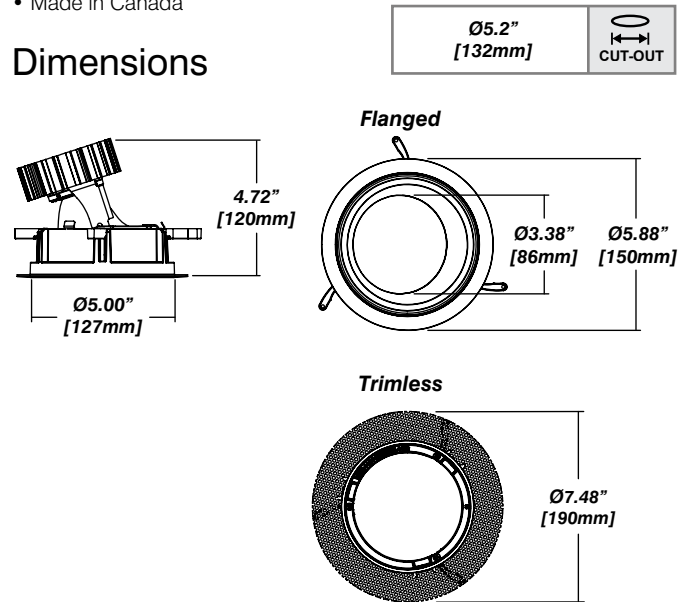


ARTEMIS 3 W

RECESSED WALL WASHING LED DOWNLIGHT

Housing Options

Standard Senso Housing - 910

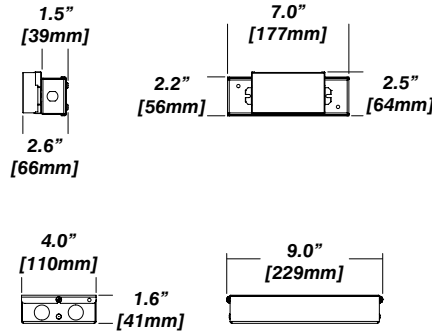



Dimension

Included

Unless specified otherwise, this is provided as standard

- Driver with enclosure**
- Galvanized steel enclosure
- Installation**
- Laying on top of ceiling
 - Remote from fixture
 - Hanger bar and mount included

New Construction - 915

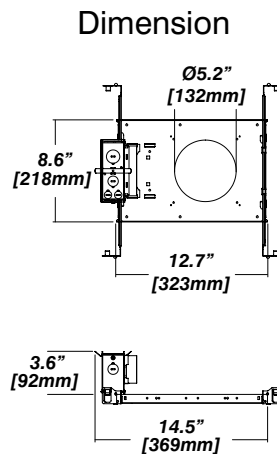
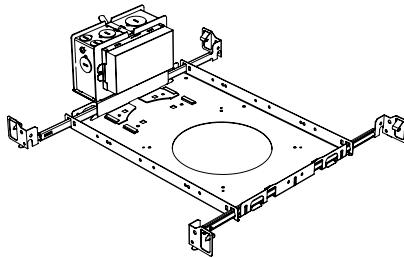


Dimension

Included

- Plaster Frame**
- Galvanized steel construction with cut-out
- Bar hanger**
- Length: from 14-3/16" to 26"
- Outlet Box**
- Outlet Box Included

IC Housing - 920

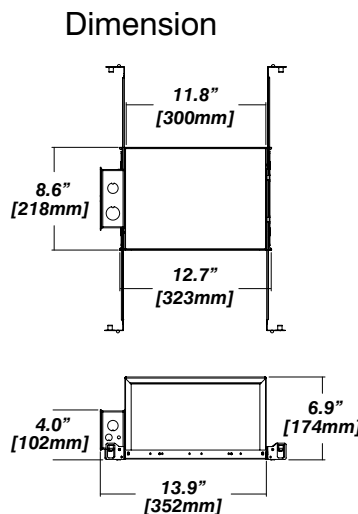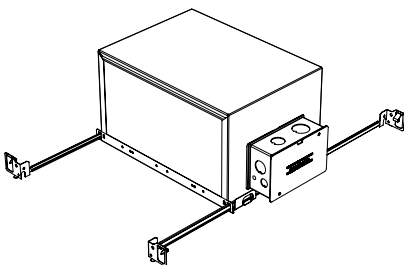

Dimension

Included

- IC Housing**
- Galvanized steel construction
 - Airtight
 - Includes gasketed junction box
- Plaster Frame**
- Galvanized steel construction
- Bar hanger**
- Length: from 14-3/16" to 26"

Note: use only with LED modules up to 1500lm

