


ARTEMIS 5

RECESSED LED DOWNLIGHT

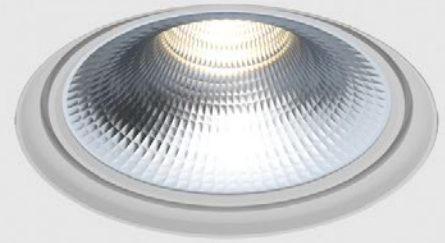

Artemis 5 - Recessed LED Downlight. Artemis 5 features SENSO-designed reflectors and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixture	AR5D								
	1	2	3	4	5	6	7	8	9
Driver		AR5D	--			--	--	--	
	1	2	3	4	5	6	7	8	

Product Specifications

SAMPLE: Fixture **AR5D - TL - A90 - 610 - 25 - 15 - DL - 02 - 08** | Driver **910 - AR5D - TL - STD - 120 - A90 - 07 - 08**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
AR5D · Artemis 5 Downlight	FL · Flanged TL · Trimless	A90 · 93+ CRI Accuracy	610 · 10° 618 · 18° 630 · 30° 645 · 45° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	15 · 1500 (13.7W) 20 · 2000 (19W) 30 · 3000 (26.8W) 40 · 4000 (37.2W) 50 · 5000 (50.2W) 60 · 6000 (66.6W)	00 · No Accessory DL · Diffusing Lens HO · Honeycomb	01 · White 02 · Black 08 · Silver XX · Custom

9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level	
01 · White 02 · Black 08 · Silver XX · Custom	910 · Remote 915 · New Construction	Same as Fixture	Same as Fixture	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{*1/2} ELDOLC · EldoLED 0 - 10 Volt ^{*3} DALI · Dali Protocol ^{*3}	N/A 1% 10% 0.1% 0.1%	LUTES · Hilume Ecodigital ^{*3} LUT2W · 2 Wire for phase ^{*2} DMX · SENSO ^{*3} EMG · Emergency Driver ^{*3/5/6} CSMB · Casambi Wireless Control ^{*5/6}	1% 1%

5 - Voltage	6 - LED	7 - Lumen	8 - Baffle Color ^{*7}
120 · 120V 277 · 277V 347 · 347V	Same as Fixture	Same as Fixture	Same as Fixture

*1 Only available in 1500lm and 2000lm
*2 120V only
*3 Only available up to 4000lm
*4 Only available up to 3000lm
*5 Requires remote housing
*6 Specified separately
*7 Only needed for Trimless

Project : _____
Quantity : _____
Type : _____
Notes : _____

ARTEMIS 5

RECESSED LED DOWNLIGHT

LED Module Performance

- Output:** up to 6000lm
- High Efficacy:** up to 117 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & 50+ R9 Value


Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations


Lumen Option	1500lm	2000lm	3000lm	4000lm	5000lm	6000lm
Fixture Wattage	13.7W	19W	26.8W	37.2W	50.2W	66.6W
Delivered Lumen	1612lm	2178lm	3080lm	4081lm	5097lm	6097lm

Accessories

Diffusing Lens

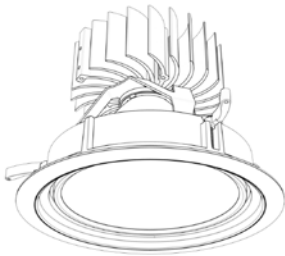

Honeycomb Mesh

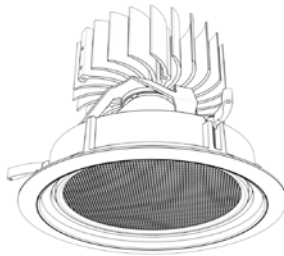





Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect

Construction / Finish


- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Rated for damp location
- Made in Canada

Dimensions

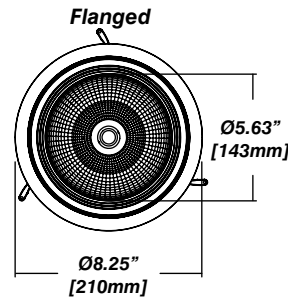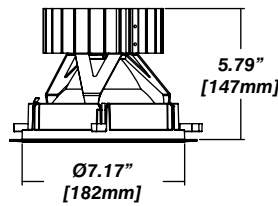

Reflector

Faceted Reflector


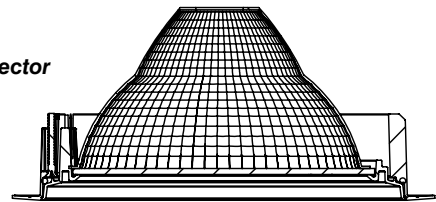


ARTEMIS 5


RECESSED LED DOWNLIGHT

Housing Options

Standard Senso Housing - 910



Dimension

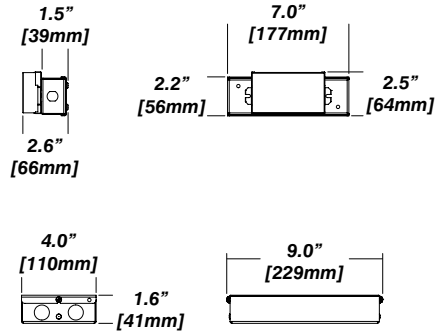

Included

Unless specified otherwise, this is provided as standard


Driver with enclosure

- Galvanized steel enclosure


Installation

- Laying on top of ceiling
- Remote from fixture
- Hanger bar and mount included

New Construction - 915

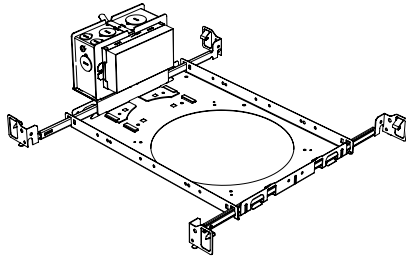

Dimension

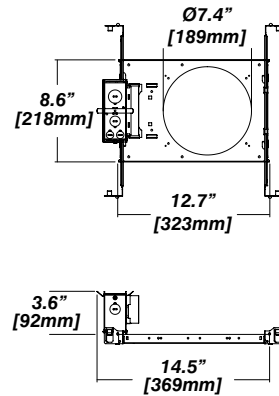

Included

Plaster Frame

- Galvanized steel construction with cut-out

Bar hanger

- Length: from 14-3/16" to 26"

Outlet Box

- Outlet Box Included