

LATONA 1 WET

WET RATED RECESSED LED DOWNLIGHT



Latona 1 Wet - Wet Rated Recessed downlight. The Latona 1 Wet is a smaller, stylish recessed fixture that features the 93+ CRI Accuracy module. This fixture is a small but a powerful option that features stationary positioning to guarantee correct position of light.

Ordering Code

Fixture	515						
	1	2	3	4	5	6	7
Driver		515			--	--	
	1	2	3	4	5	6	

Product Specifications

SAMPLE: Fixture **515 - A90 - 615 - 27 - 07 - 00 - 01** | Driver **910 - 515 - STD - 120 - A90 - 07**

1 - Model	2 - LED	3 - Reflector	4 - CCT	5 - Lumen	6 - Accessory	7 - Finish
515 · Latona 1 Wet-Rated	A90 · 93+ CRI Accuracy	615 · 15° 638F · 38° Faceted 640 · 40° 660 · 60°	27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K	07 · 700 (6.1W) 10 · 1000 (9.1W) 15 · 1500 (14W)	CL · Clear Lens DL · Diffusing Lens	01 · White 02 · Black 08 · Silver XX · Custom

1 - Housing Style	2 - Model	3 - Driver	Dim Level	Dim Level	4 - Line Voltage
910 · Remote 915 · New construction 920 · IC Housing ^{*1/2}	Same as Fixture	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{*3} ELDOLC · EldoLED 0 - 10 Volt ^{*4} DALI · Dali Protocol ^{*4}	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital ^{*4} LUT2W · 2 Wire for phase ^{*3/4} DMX · SENSO ^{*4} EMG · Emergency Driver ^{*4/5}	1% 1% 120 · 120V 277 · 277V 347 · 347V ^{*4/6}

5 - LED	6 - Lumen
Same as Fixture	Same as Fixture

*1 JA8 Compliant
*2 1000lm max
*3 120V only
*4 Requires remote housing
*5 Specified separately
*6 Not available with ELDO, Lutron or DMX

Project : _____
Quantity : _____
Type : _____
Notes : _____

LATONA 1 WET

WET RATED RECESSED LED DOWNLIGHT

Light Engine

- Output:** up to 1500lm
- High Efficacy:** up to 93 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & 50+ R9 Value

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations

Lumen Option	700lm	1000lm	1500lm
Delivered Lumen	569lm	841lm	1262lm
Fixture Wattage	6.1W	9.1W	14W


Installation

- For new and retrofit installations
- Easy installation with spring loaded tabs
- Simple connection between fixture and driver via quick connect
- Wet Rated for damp areas

Construction/Finish


- Powder coated in white, black or silver
- Custom finish are available
- Cast aluminum
- Seismic tether
- Made in Canada

Dimensions

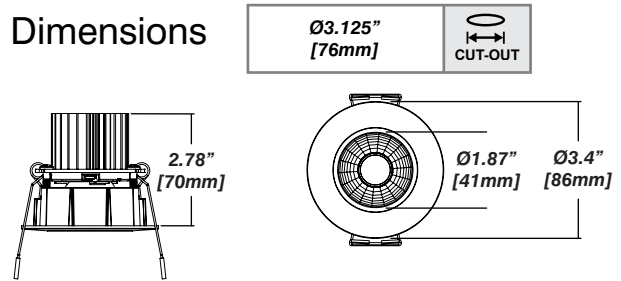


Reflector

Faceted Reflector



Smooth Reflector




LATONA 1 WET

WET RATED RECESSED LED DOWNLIGHT




Housing Options

Standard Senso Housing - 910

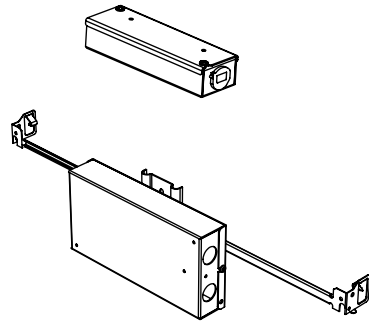

Dimension

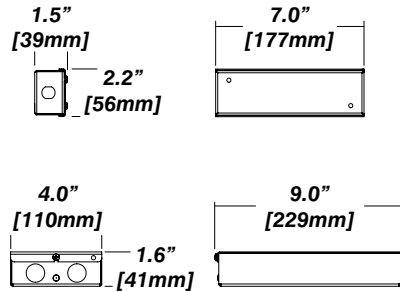

Included


Unless specified otherwise, this is provided as standard

- Bar hanger**
 - Included with large 910 box only
 - Length: from 14-3/16" to 26"
 - Mounting screws not included
- Driver with enclosure**
 - Galvanized steel enclosure
- Security wire**
 - Flexible aircraft cable, 12" long
 - Easy to clip snap body included


*driver can be installed either:

- (A) laying on top of ceiling.
- (B) mounted to the bar hanger and fixed to the ceiling.
- (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

New Construction - 915 Flanged




Dimension




Included

- Plaster Frame**
 - Galvanized steel construction
- Bar hanger**
 - Length: from 14-3/16" to 26"
- Outlet Box**
 - Standard Senso housing 910 included
- Security wire**
 - Flexible aircraft cable, 12" long
 - Easy to clip snap body included

IC Housing - 920



Dimension

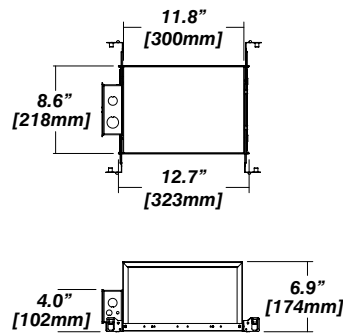

Included

- IC Housing**
 - Galvanized steel construction
 - Airtight
 - Includes gasketed junction box
- Plaster Frame**
 - Galvanized steel construction
- Bar hanger**
 - Length: from 14-3/16" to 26"

Note: Lumen output cannot exceed 1000lm
Not available in flangeless

