

LETO 11 UD

PENDANT LED UPLIGHT AND DOWNLIGHT



Leto 11 UD - Uplight and Downlight Pendant LED Light. LETO 11 UD's unique design gives it the utility of a powerful downlight with the aesthetic quality of accent uplight.

Ordering Code

Fixture	692							
	1	2	3	4	5	6	7	8
Driver							--	--
	1	2	3	4	5	6	7	8

Product Specifications

SAMPLE: Fixture **692 - A90 - 61017 - 27 - 0707 - 00 - 08 - 08** | Driver **952 - 01 - 01 - STD - 120 - A90 - 0707**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory*2
692 · Leto 11 UD	A90 · 93+ CRI Accuracy	<i>Down Faceted</i> <i>Up</i> 610 · 10° 17 · 17° 618 · 18° 24 · 24° 630 · 30° 60 · 60° 645 · 45° 660 · 60° 728 · 28° Glass Optic*1 748 · 48° Glass Optic*1 <i>Down Smooth</i> 630S · 30° 645S · 45°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	<i>Direct / Indirect</i> 0707 · 700/700 1010 · 1000/1000 1515 · 1500/1500 <i>For other direct / indirect possibilities please contact factory team</i> Wattage on page 3	00 · No Accessory AR · Acrylic Ring DL · Diffusing Lens HO · Honeycomb SL · Solite Lens

7 - Body Color	8 - Baffle Color	1 - Canopy Style	2 - Canopy Color	3 - Suspension (6' incl.)
<i>Standard</i> <i>Premium</i> 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick XX · RAL	<i>Standard</i> <i>Premium</i> 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick XX · RAL	951 · Round 951F · Round Flangeless*5 952 · Square	<i>Standard</i> <i>Premium</i> 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick XX · RAL	02 · 2 Aircraft + Feed Cable 05 · 2 Powered Aircraft*3 Contact Senso for custom length

4 - Suspension Color	5 - Driver	Dim Level	Dim Level	6 - Voltage	7 - LED	8 - Lumen
00 · None*3 01 · White 02 · Black 03 · Clear XX · Custom	STD · Non Dimming N/A LCS · 0 - 10 Volt Protocol 1% DIM · Phase*4 1% ELDOLC · EldoLED 0 - 10 Volt*5 0.1% DALI · Dali Protocol*5 0.1%	LUTES · HiLume Ecodigital*5 1% DMX · SENSO*5 EMG · Emergency Driver*5/6 CSMB · Casambi Wireless Control*5/6	120 · 120V 277 · 277V 347 · 347V*5/7	Same as Fixture Same as Fixture	Same as Fixture Same as Fixture	

*1 accessories not available *5 remote mount driver
 *2 available on downlight only *6 second driver required
 *3 no suspension color option for **05** - 2 Powered Aircraft *7 not available with ELDO, Lutron or DMX
 *4 120V only

LETO 11 UD

PENDANT LED UPLIGHT AND DOWNLIGHT

Canopy / Suspension

Round Canopy: W - Ø5.17" [131.24 mm] / H - 2.36" [60mm]

Drivers mounted in the Round Canopy: **STD, LCS, DIM**

Drivers remote mounted: **ELDOLC, DALI, LUTES, DMX, EMG, CSMB**

Square Canopy: W/L - 5.67" [144mm] / H - 2.28" [58mm]


Drivers mounted in the Square Canopy: **STD, LCS, DIM, ELDOLC, DALI, LUTES**

Drivers remote mounted: **DMX, EMG, CSMB**


Round Flangless: W - Ø2.53" [64.25 mm]

All drivers remote mount

2 Aircraft Cable
w/ Feed Cable



2 Powered
Aircraft Cable



Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector



Domed Glass Optic






Installation

- The included canopy fits on a standard junction box
- Height adjustable dual-aircraft cable included
- Electrical feed cable included

Construction / Finish


- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions

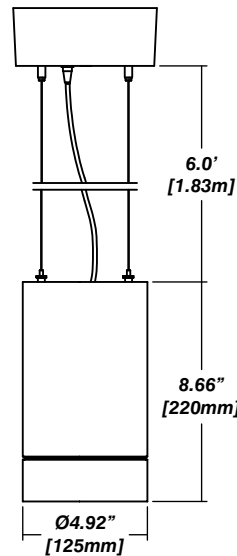


Accessories

Acrylic Ring




Diffusing Lens



Solite Lens



Honeycomb Mesh



LETO 11 UD

PENDANT LED UPLIGHT AND DOWNLIGHT



Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 104 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R⁹ - 60 R^f - 90 R⁹ - 100

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available


Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety


Installation: Remote mounted

Lumen Option	700/700	1000/1000	1500/1500
Fixture Wattage	12.2W	18.2W	30W
Delivered Lumen	1270lm	1851lm	2810lm

Leto Light Distribution: Reflector

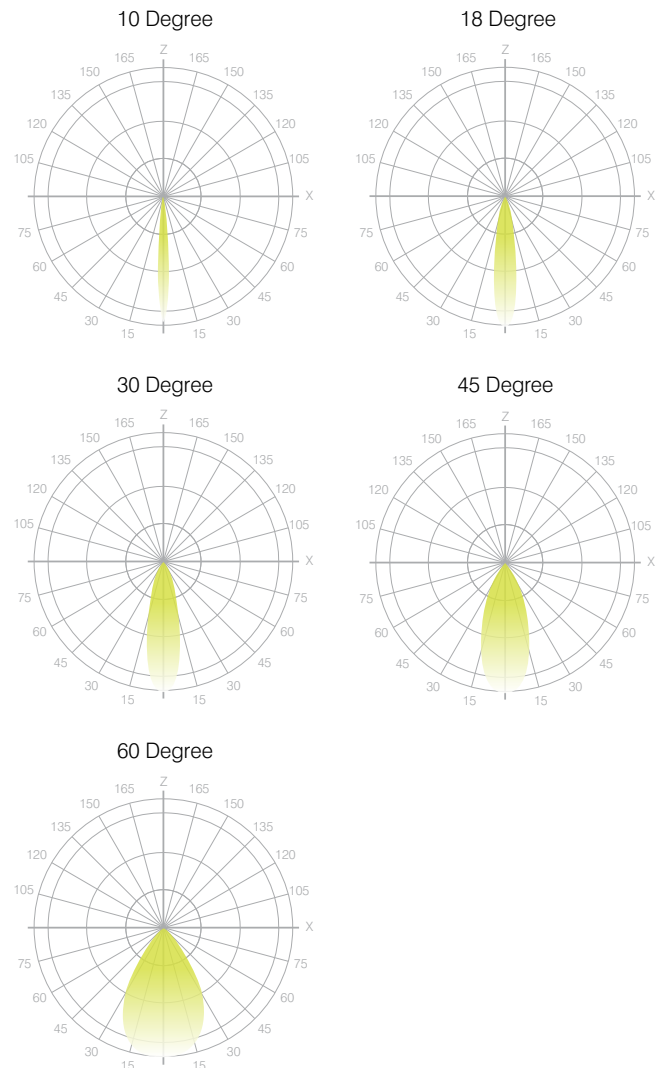

Leto Light Distribution: Glass Optic

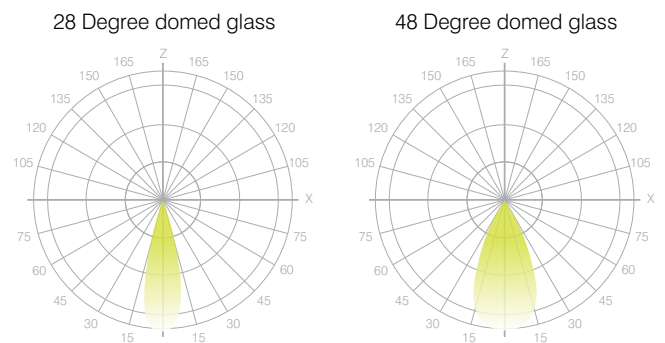

LETO 11 UD

PENDANT LED UPLIGHT AND DOWNLIGHT

