



**Features**

- Constant voltage output
- Input Voltage, 120-277VAC
- Compatible with Triac, MLV, ELV, & 0-10V Dimmers
- Flicker-free dimming
- Cooling by free air convection
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- Load 10 – 100%
- Dry location (IP20)
- 5 year Warranty

Patent Number  
US10278251B1



IP20

**Technical Information**

**Input voltage**

120-277V AC, 1.1A, 50/60Hz

**Output signal**

24 VDC, 4.0 A

**Maximum wattage**

96 watt circuits

**Dimming curve**

Linear, 100% - 0% (HydraDrive)

**Mounting**

Surface mounted with conduit access

**Ambient Operating Temperature**


-20C to +35C

**Weight**


3.8 lbs

**Diming Options**

WW	0-10V (dimmer needs to be capable to dim to 0% without ON/OFF switch)
W2C	Standard Two Channel: Dim 1: Intensity; Dim 2: CCT

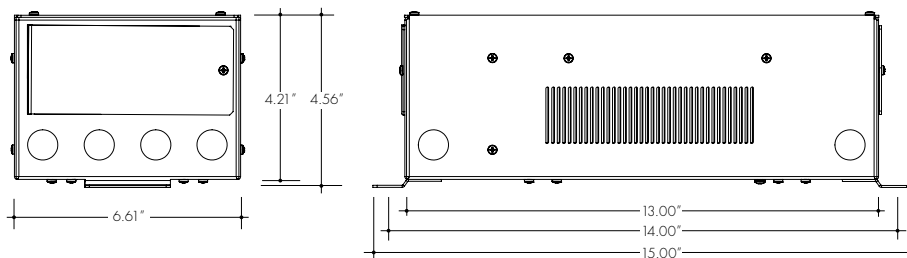

**Wiring Diagram**

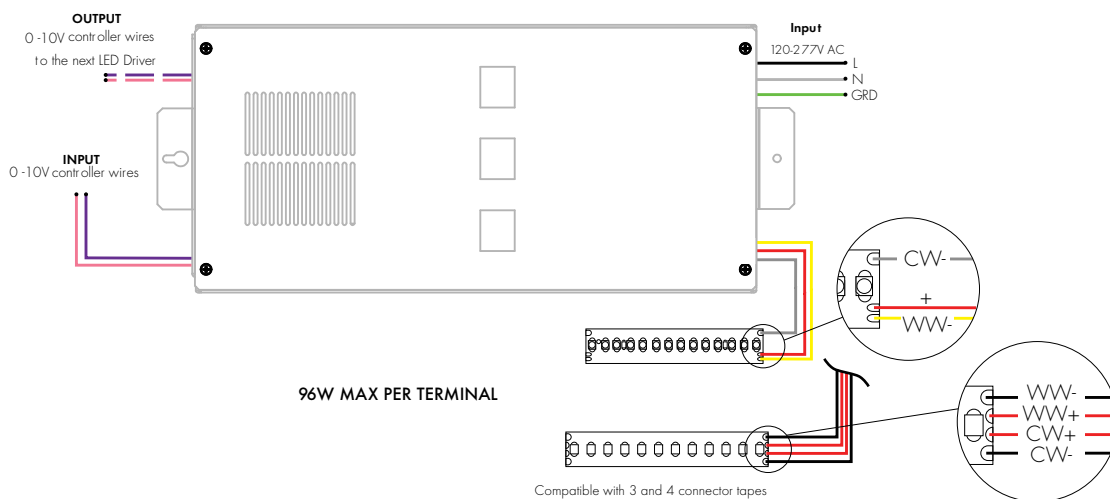

**Ordering Code**

MODEL	POWER	OUTPUT	CONTROL TYPE
PS010VD-0-10V VintageDim® LED Driver	3X96 - 3 x 96 W	24 - 24 VDC	W2C - Standard Two Channel: Dim 1: Intensity; Dim 2: CCT WW - Standard One Channel - Dim to Warm Curve