

LETO 11 Mini P

PENDANT LED DOWNLIGHT



LETO 11 Mini - Pendant LED Light. Leto 11 Mini is a slimmed down version of the Leto 11. This small, medium and tall pendant is slim and offers sleek minimalism to sitting and work areas with an efficient and powerful LED module.

Ordering Code

Fixture	691								
	1	2	3	4	5	6	7	8	9
Driver							--	--	
	1	2	3	4	5	6	7	8	

Product Specifications

SAMPLE: Fixture **691 - S - A90 - 617 - 27 - 07 - 00 - 08 - 02** | Driver **954 - 08 - 05 - 00 - STD - 120 - A90 - 07**

1 - Model	2 - Size	3 - CRI/LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory
691 · Leto 11 Mini Pendant	S · Small (73mm) M · Medium (209mm) L · Large (346mm)	A90 · 93+ CRI Accuracy	617 · 17° 624 · 24° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6.1W) 10 · 1000 (9.1W) 15 · 1500 (14W)	00 · No Accessory DL · Diffusing Film HO · Honeycomb*

8 - Body Color	9 - Baffle Color	1 - Canopy Style	2 - Canopy Color	3 - Suspension Type
<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick BZ · Bronze WN · Warm Nickel AB · Aged Brass XX · RAL	<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick BZ · Bronze WN · Warm Nickel AB · Aged Brass XX · RAL	955 · Round Slim 965 · Square Slim 955F · Round Flangeless*2 954 · Round Semi-Recessed	<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick BZ · Bronze WN · Warm Nickel AB · Aged Brass XX · RAL	00 · Feed Cable (6' incl.) 03 · Solid Stem (6' MAX) 05 · 2 Powered Aircraft*3 (6' incl.) <small>Contact SENSO for custom lengths</small>

4 - Suspension Color	5 - Driver	Dim Level	Dim Level	6 - Voltage	7 - CRI/LED	8 - Lumen
00 · None*3 01 · White 02 · Black 03 · Clear*1 XX · Custom	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase*4 ELDOLC · EldoLED 0 - 10 Volt*2	N/A 1% 1% 0.1%	DALI · Dali Protocol*2 LUTES · Hilume Ecodigital*2 LUT2W · 2 Wire for phase*2/4 CSMB · Casambi Wireless Control*2/5	120 · 120V 277 · 277V 347 · 347V*6	Same as Fixture	Same as Fixture

*1 not available with small size

*2 remote mount driver

*3 no feed cable color option for **05** - 2 Powered Aircraft

*4 120V only

*5 second driver required

*6 not available with DALI or Lutron drivers

LETO 11 Mini P

PENDANT LED DOWNLIGHT



LED Module Performance

- Output:** up to 1500lm
- High Efficacy:** up to 110 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 93+ CRI & 50+ R9 Value


Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Lumen Option	700lm	1000lm	1500lm
Delivered Lumen	668lm	1002lm	1441lm
Fixture Wattage	6.1W	9.1W	14W

Driver Placement

- **Standard, LCS, and Phase dimming** drivers may be mounted in the junction box.
- Minimum volume required to mount drivers in junction box:
70mm x 40mm x 30mm

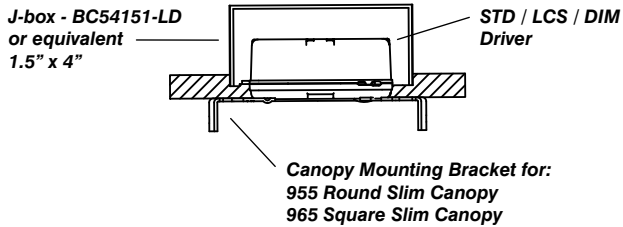

Installation


- Height adjustable feed cable, powered aircraft cable or solid stem included
- Pre-assembled for quick installation

Construction


- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

Dimensions


L - Large

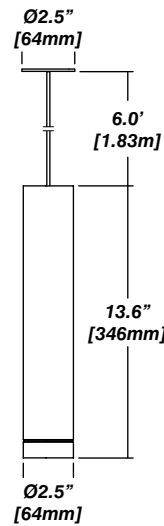

M - Medium

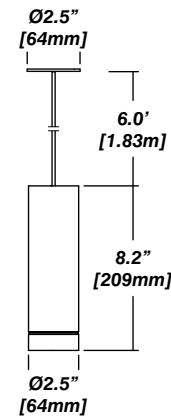

S - Small

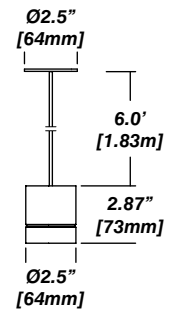


LETO 11 Mini P

PENDANT LED DOWNLIGHT

Accessories


Diffusing Film

Honeycomb

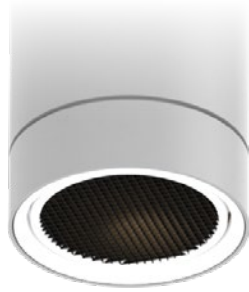

Standard Finishes

01 - White



02 - Black



08 - Silver



Premium Finishes

55 - Mocha



56 - Charcoal



57 - Cerulean



58 - Firebrick




BZ - Bronze



WN - Warm Nickel




AB - Aged Brass




Canopy


955 - Round Slim

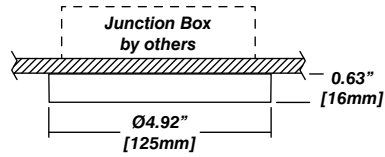


965 - Square Slim

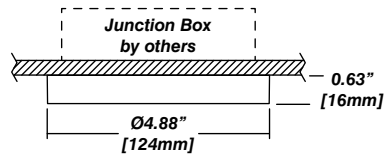

955F - Round Flangeless

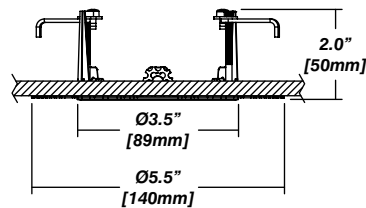

954 - Semi-Recessed +
Cylinder Driver Housing

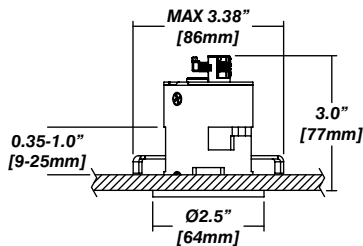

Ø2.125"
[54mm]

CUT-OUT


LETO 11 Mini P

PENDANT LED DOWNLIGHT



Senso Driver Housings

910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






Dimensions

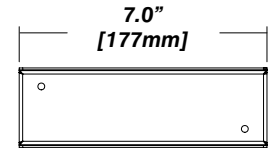




910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location

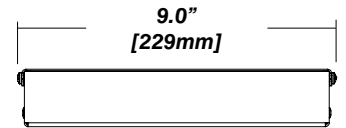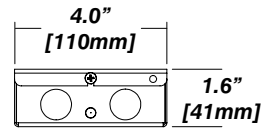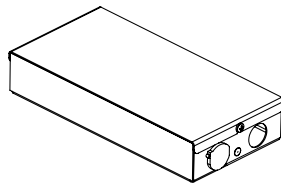

954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy

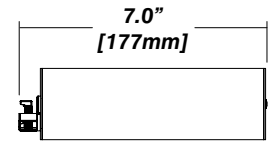

954 Driver Layouts

954 with Cylinder Driver Housing


- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



954 with Cylinder Driver Housing

+ 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

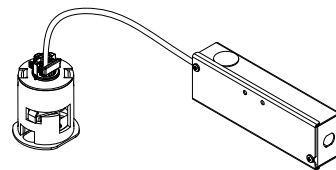

954 with Cylinder Driver Housing

+ 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

