



FLEX DC® 15 is a high performance flexible LED fixture suitable for use in coves, under cabinets, in shelves, in-grade, and virtually anywhere a linear fixture is required.

ELECTRICAL

Input Voltage	24VDC
Dimming Options	<ul style="list-style-type: none"> • PURE DC™ • MLV • 0-10V • DMX • Lutron (2-WIRE, 3-WIRE, EcoSystem)
Power Consumption	1.5 Watts per foot (18 LEDs per foot)
Wire Size	18AWG, 2 wire
Certification	<p>ETL - Conforms to UL Std. 2108; Certified to CSA Std. C22.2 No. 9.0.</p> <p>Closet Rated - Suitable for installation in the storage area of a clothes closet when used in Optic Arts® channel.</p> <p>Title 24 - Selected models are JA8 2016 compliant when used with 0-10V, DMX, or Lutron Premier dimming. JA8 option must be specified in part number builder below.</p>

PHYSICAL

Field Cuttable	Every 3.94"
Operating Temperature	-40° C (-40°F) to +70° C (+158°F)
Environment	<p>IP40 - Dry Location</p> <p>IP68 - Wet Location</p>
Maximum Run Length	IP40: 64', IP68: 64'
Dimensions (WxH)	<p>IP40 - 0.32" (8.00mm) x 0.1" (2.54mm)</p> <p>IP68 - 0.42" (10.70mm) x 0.19" (4.80mm)</p> <p>IP68 Endcaps - 0.50" (12.70mm) x 0.31" (7.87mm)</p>

ACCESSORIES

Mounting Clips	FLEXMNT.SIL.INT, FLEXMNT.SIL.EXT12 (pg. 7)
Channels	Optic Arts® Channel (pg. 3-6)
Connectors	LC-I2P-M, LC-I2P-F, LC-O2P-F, LC-O2P-M (pg. 7)
FLEXConfig-1 Accessories	FLEXDC.PFC.02.08, FLEXDC.BSC.02.08, LO-18G-2C-W-72, LP-18G-2C-W-72, LO-18G-2C-W-SP, LP-18G-2C-W-SP (pg. 8)

LUMEN OUTPUT

2000K (IP40 only)	92.65 lm/ft 61.62 lm/Watt
2400K	113.67 lm/ft 75.78 lm/Watt
2400K JA8 2016 (IP40 only) ¹	113.67 lm/ft 75.78 lm/Watt
2700K	133.47 lm/ft 88.98 lm/Watt
3000K	134.07 lm/ft 89.38 lm/Watt
3000K JA8 2016 (IP40 only) ¹	134.07 lm/ft 89.38 lm/Watt
3500K	141.31 lm/ft 94.21 lm/Watt
4100K	144.50 lm/ft 96.33 lm/Watt
6000K	140.01 lm/ft 93.34 lm/Watt
Amber	39.58 lm/ft 26.39 lm/Watt

Note: Stated lumen values have a tolerance of +/- 10%.
1: Must be used with 0-10V, DMX, or Lutron Premier dimming.

PERFORMANCE

CRI	90+
Lumen Maintenance	50,000 Hours
Binning Tolerance	+/- 100K
Warranty	5 years

PART NUMBER BUILDER



SERIES	+	IP RATING	+	COLOR	+	VOLTAGE	+	WATTAGE	+	CONFIGURATION	+	LENGTH	
FLEXDC		<p>40 = IP40 - Dry Location</p> <p>68 = IP68 - Wet Location</p>		<p>20 = 2000K (IP40 only)</p> <p>24 = 2400K</p> <p>24J = 2400K JA8 2016 (IP40 only)¹</p> <p>27 = 2700K</p> <p>30 = 3000K</p> <p>30J = 3000K JA8 2016 (IP40 only)¹</p>		<p>35 = 3500K</p> <p>41 = 4100K</p> <p>60 = 6000K</p> <p>R = Red</p> <p>G = Green</p> <p>B = Blue</p> <p>A = Amber</p>		24 = 24 VDC		15 = 1.5W		<p>FLC1 = FLEX Config 1</p> <p>FLC2 = FLEX Config 2</p> <p>FLC3 = FLEX Config 3</p>	XX = Custom Length

¹: Must be used with 0-10V, DMX, or Lutron Premier dimming.



DIMENSIONS



INDOOR FLEX DC® 15

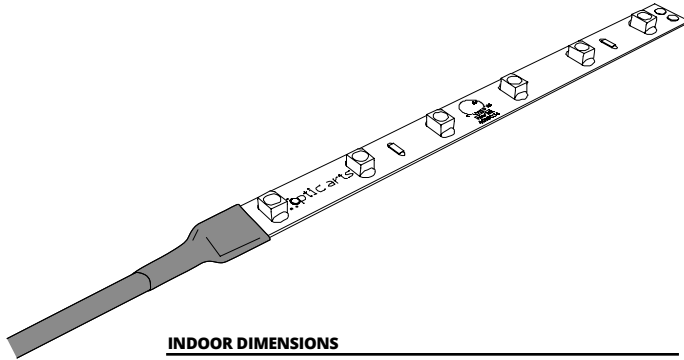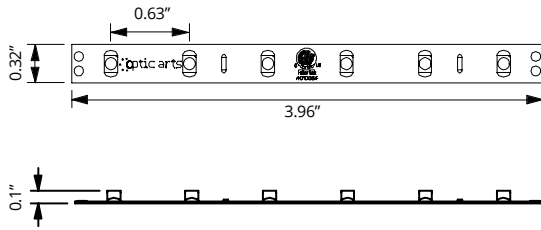

INDOOR DIMENSIONS

Width	0.32" (8.00mm)
Height	0.10" (2.54mm)
Cuttable Segment Length	3.94" (100.01mm)
Pitch Length	0.63" (16.00mm)
Max Run Length	64.00' (19507.20mm)


OUTDOOR FLEX DC® 15

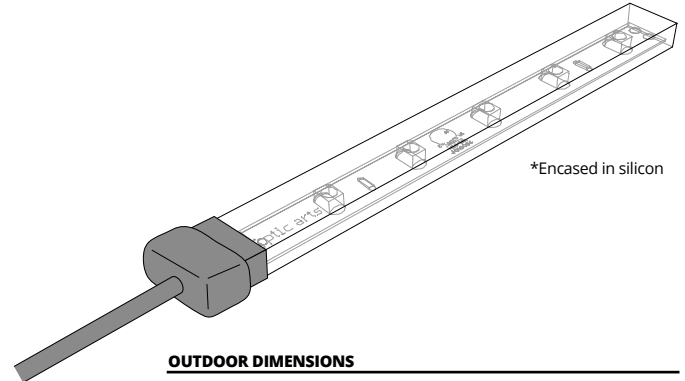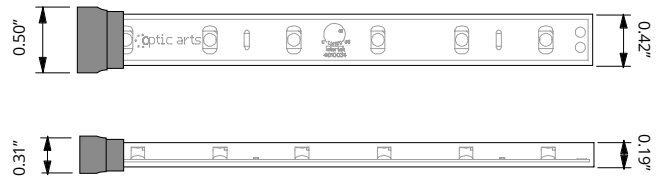


OUTDOOR DIMENSIONS

Width	0.42" (10.55mm)
Height	0.19" (4.80mm)
Width (Endcap)	0.50" (12.70mm)
Height (Endcap)	0.31" (7.87mm)
Max Run Length	64.00' (19507.20mm)

INDOOR FLEX DC® 15

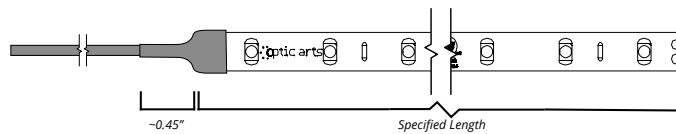


OUTDOOR FLEX DC® 15

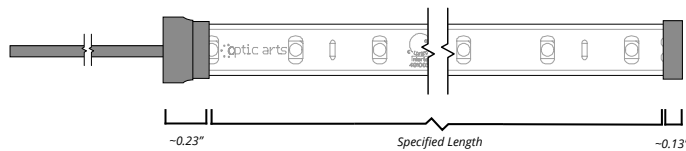

KEY

CHANNEL PART NUMBER BREAKDOWN:

CHS	+	R	+	1208
SERIES		APPLICATION		DIMENSIONS
CHS = Slim Channel CHW = Wide Channel		S = Surface Mount R = Recessed Mount C = Corner Mount H = Hanging Mount		XXXX = W x H (mm)



• Click on channel titles below to access complete channel cut sheets



Not Blended



Blended w/Milky Lens



Center Blend

CHS-R-1208



MATERIAL
Anodized Aluminum

DESCRIPTION
Slim and shallow recessed channel.


LENGTH
2 meter

LENS TYPES

Clear	CHS-12mm-CC
Frosted	CHS-12mm-CF
Milky	CHS-12mm-CM

ACCESSORIES

Endcap	CHS-R-1208-EC
Endcap w/hole	CHS-R-1208-ECH



- A:** 0.68" (17.25mm)
- B:** 0.50" (12.59mm)
- C:** 0.98" (25.00mm)
- D:** 0.34" (8.60mm)

CHS-S-1208



MATERIAL
Anodized Aluminum

DESCRIPTION
Slim and shallow surface mounted channel.


LENGTH
2 meter

LENS TYPES

Clear	CHS-12mm-CC
Frosted	CHS-12mm-CF
Milky	CHS-12mm-CM
Grazer	CHS-12mm-CG

ACCESSORIES

Endcap	CHS-S-1208-EC
Endcap w/hole	CHS-S-1208-ECH
Mounting Clip	CHS-S-1208-MC
Rotating Mounting Clip	CHS-S-1208-MCR



- A:** 0.68" (17.25mm)
- B:** 0.50" (12.59mm)
- C:** 0.34" (8.60mm)
- D:** 0.40" (12.70mm)
- E:** 0.78" (19.90mm)

CHS-C-1919



MATERIAL
Anodized Aluminum

DESCRIPTION
Slim corner mount channel.


LENGTH
2 meter

LENS TYPES

Clear	CHS-12mm-CC
Frosted	CHS-12mm-CF
Milky	CHS-12mm-CM

ACCESSORIES

Endcap	CHS-C-1919-EC
Endcap w/hole	CHS-C-1919-ECH
Mounting Clip	CHS-C-1919-MC



- A:** 0.73" (18.50mm)
- B:** 0.48" (12.20mm)
- C:** 0.73" (18.50mm)
- D:** 0.82" (20.82mm)
- E:** 0.82" (20.82mm)

CHS-R-1715



MATERIAL
Anodized Aluminum

DESCRIPTION
Slim and deep recessed channel. Eliminates visible LED nodes when used with FLEXDC 3.0 and milk lens.


LENGTH
2 meter

LENS TYPES

Clear	CHS-12mm-CC
Frosted	CHS-12mm-CF
Milky	CHS-12mm-CM
Grazer	CHS-12mm-CG

ACCESSORIES

Endcap	CHS-R-1715-EC
Endcap w/hole	CHS-R-1715-ECH



- A:** 0.68" (17.25mm)
- B:** 0.48" (12.30mm)
- C:** 0.98" (25.00mm)
- D:** 0.59" (15.05mm)

MOUNTING OPTIONS - COMPATIBLE CHANNELS



Not Blended



Blended w/Milky Lens

CHS-S-1715



MATERIAL

Anodized Aluminum

DESCRIPTION

Slim and deep surface mounted channel. Eliminates visible LED nodes when used with FLEXDC 3.0 and milky lens.

LENGTH


2 meter

LENS TYPES

Clear	CHS-12mm-CC
Frosted	CHS-12mm-CF
Milky	CHS-12mm-CM
Grazer	CHS-12mm-CG

ACCESSORIES

Endcap	CHS-S-1715-EC
Endcap w/hole	CHS-S-1715-ECH
Mounting Clip	CHS-S-1715-MC
Rotating Mounting Clip	CHS-S-1715-MCR



- A:** 0.68" (17.25mm)
- B:** 0.48" (12.30mm)
- C:** 0.59" (15.05mm)
- D:** 0.66" (16.76mm)
- E:** 0.78" (19.90mm)

CHS-C-1616



MATERIAL

Anodized Aluminum

DESCRIPTION

Slim corner mount channel with rounded lens.

LENGTH


2 meter

LENS TYPES

Frosted	CHS-C-1616-CF
Milky	CHS-C-1616-CM

ACCESSORIES

Endcap	CHS-C-1616-EC
Endcap w/hole	CHS-C-1616-ECH
Mounting Clip	CHS-C-1616-MC



- A:** 0.63" (16.00mm)
- B:** 0.39" (10.00mm)
- C:** 0.63" (16.00mm)
- D:** 0.70" (17.78mm)
- E:** 0.70" (17.78mm)

CHS-S-1922S



MATERIAL

Anodized Aluminum

DESCRIPTION

Slim surface mounted channel with square wrap around lens. Mounting clip is fully concealed within fixture base.

LENGTH


2 meter

LENS TYPES

Milky	CHW-S-1922S-CM
-------	----------------

ACCESSORIES

Endcap	CHS-S-1922S-EC
Endcap w/hole	CHS-S-1922S-ECH
Mounting Clip	CHS-S-1922S-MC



- A:** 0.77" (19.50mm)
- B:** 0.65" (16.50mm)
- C:** 0.86" (21.80mm)

CHS-S-1922R



MATERIAL

Anodized Aluminum

DESCRIPTION

Slim surface mounted channel with rounded wrap around lens. Mounting clip is fully concealed within fixture base.

LENGTH


2 meter

LENS TYPES

Milky	CHW-S-1922R-CM
-------	----------------

ACCESSORIES

Endcap	CHS-S-1922R-EC
Endcap w/hole	CHS-S-1922R-ECH
Mounting Clip	CHS-S-1922R-MC



- A:** 0.77" (19.50mm)
- B:** 0.65" (16.50mm)
- C:** 0.86" (21.80mm)

CHW-S-2010



MATERIAL

Anodized Aluminum

DESCRIPTION

Low profile surface mounted channel.

LENGTH


2 meter

LENS TYPES

Clear	CHW-S-2010-CC
Frosted	CHW-S-2010-CF
Milky	CHW-S-2010-CM

ACCESSORIES

Endcap	CHW-S-2010-EC
Endcap w/hole	CHW-S-2010-ECH
Mounting Clip	CHW-S-2010-MC
Rotating Mounting Clip	CHW-S-2010-MCR



- A:** 0.93" (23.50mm)
- B:** 0.78" (20.00mm)
- C:** 0.39" (10.00mm)
- D:** 0.48" (12.19mm)
- E:** 1.02" (25.80mm)

CHW-R-2010



MATERIAL

Anodized Aluminum

DESCRIPTION

Recessed wide-profile channel.

LENGTH


2 meter

LENS TYPES

Clear	CHW-R-2010-CC
Frosted	CHW-R-2010-CF
Milky	CHW-R-2010-CM

ACCESSORIES

Endcap	CHW-R-2010-EC
Endcap w/hole	CHW-R-2010-ECH



- A:** 0.93" (23.50mm)
- B:** 0.78" (20.00mm)
- C:** 0.39" (10.00mm)
- D:** 1.19" (30.24mm)

MOUNTING OPTIONS - COMPATIBLE CHANNELS



Not Blended




Blended w/Milky Lens

CHW-C-3030



MATERIAL	Anodized Aluminum							
DESCRIPTION	45 degree channel with rounded lens.							
LENGTH	2 meter							
LENS TYPES	<table border="0"> <tr> <td>Clear</td> <td>CHW-C-3030-CC</td> </tr> <tr> <td>Frosted</td> <td>CHW-C-3030-CF</td> </tr> <tr> <td>Milky</td> <td>CHW-C-3030-CM</td> </tr> </table>		Clear	CHW-C-3030-CC	Frosted	CHW-C-3030-CF	Milky	CHW-C-3030-CM
Clear	CHW-C-3030-CC							
Frosted	CHW-C-3030-CF							
Milky	CHW-C-3030-CM							
ACCESSORIES	<table border="0"> <tr> <td>Endcap</td> <td>CHW-C-3030-EC</td> </tr> <tr> <td>Endcap w/hole</td> <td>CHW-C-3030-ECH</td> </tr> <tr> <td>Mounting Clip</td> <td>CHW-C-3030-MC</td> </tr> </table>		Endcap	CHW-C-3030-EC	Endcap w/hole	CHW-C-3030-ECH	Mounting Clip	CHW-C-3030-MC
Endcap	CHW-C-3030-EC							
Endcap w/hole	CHW-C-3030-ECH							
Mounting Clip	CHW-C-3030-MC							




- A:** 1.18" (30.00mm)
- B:** 0.78" (20.20mm)
- C:** 1.18" (30.00mm)
- D:** 1.29" (32.77mm)
- E:** 1.29" (32.77mm)

CHW-C-3030S



MATERIAL	Anodized Aluminum							
DESCRIPTION	45 degree channel with square lens.							
LENGTH	2 meter							
LENS TYPES	<table border="0"> <tr> <td>Clear</td> <td>CHW-C-3030S-CC</td> </tr> <tr> <td>Frosted</td> <td>CHW-C-3030S-CF</td> </tr> <tr> <td>Milky</td> <td>CHW-C-3030S-CM</td> </tr> </table>		Clear	CHW-C-3030S-CC	Frosted	CHW-C-3030S-CF	Milky	CHW-C-3030S-CM
Clear	CHW-C-3030S-CC							
Frosted	CHW-C-3030S-CF							
Milky	CHW-C-3030S-CM							
ACCESSORIES	<table border="0"> <tr> <td>Endcap</td> <td>CHW-C-3030S-EC</td> </tr> <tr> <td>Endcap w/hole</td> <td>CHW-C-3030S-ECH</td> </tr> <tr> <td>Mounting Clip</td> <td>CHW-C-3030S-MC</td> </tr> </table>		Endcap	CHW-C-3030S-EC	Endcap w/hole	CHW-C-3030S-ECH	Mounting Clip	CHW-C-3030S-MC
Endcap	CHW-C-3030S-EC							
Endcap w/hole	CHW-C-3030S-ECH							
Mounting Clip	CHW-C-3030S-MC							




- A:** 1.18" (30.00mm)
- B:** 0.78" (20.20mm)
- C:** 1.18" (30.00mm)
- D:** 1.29" (32.77mm)
- E:** 1.29" (32.77mm)

CHW-S/H-3535



MATERIAL	Anodized Aluminum																					
DESCRIPTION	Wide and deep surface mounted or hanging channel. Eliminates visible LED nodes for most FLEXDC products when used with a milky lens.																					
LENGTH	2 meter																					
LENS TYPES	<table border="0"> <tr> <td>Frosted</td> <td>CHW-35mm-CF</td> </tr> <tr> <td>Milky</td> <td>CHW-35mm-CM</td> </tr> </table>		Frosted	CHW-35mm-CF	Milky	CHW-35mm-CM																
Frosted	CHW-35mm-CF																					
Milky	CHW-35mm-CM																					
ACCESSORIES	<table border="0"> <tr> <td>Endcap</td> <td>CHW-S-3535-EC</td> </tr> <tr> <td>Endcap w/hole</td> <td>CHW-S-3535-ECH</td> </tr> <tr> <td>Mounting Clip</td> <td>CHW-S-3535-MC</td> </tr> <tr> <td>Hanging Hardware</td> <td>CHW-SH-3535-MW</td> </tr> <tr> <td>Bracket Straight</td> <td>CHW-S-XX35-B5</td> </tr> <tr> <td>Bracket 90° Flat</td> <td>CHW-S-XX35-B90F</td> </tr> <tr> <td>Bracket 90° Raised</td> <td>CHW-S-XX35-B90R</td> </tr> <tr> <td>End Cap for FLEX AC</td> <td>CHW-S-3535-ECAC</td> </tr> <tr> <td>Mounting Clip for FLEX AC</td> <td>CHW-S-3535-MCAC</td> </tr> <tr> <td>VHB Tape</td> <td>VHBTAPE.AC</td> </tr> </table>		Endcap	CHW-S-3535-EC	Endcap w/hole	CHW-S-3535-ECH	Mounting Clip	CHW-S-3535-MC	Hanging Hardware	CHW-SH-3535-MW	Bracket Straight	CHW-S-XX35-B5	Bracket 90° Flat	CHW-S-XX35-B90F	Bracket 90° Raised	CHW-S-XX35-B90R	End Cap for FLEX AC	CHW-S-3535-ECAC	Mounting Clip for FLEX AC	CHW-S-3535-MCAC	VHB Tape	VHBTAPE.AC
Endcap	CHW-S-3535-EC																					
Endcap w/hole	CHW-S-3535-ECH																					
Mounting Clip	CHW-S-3535-MC																					
Hanging Hardware	CHW-SH-3535-MW																					
Bracket Straight	CHW-S-XX35-B5																					
Bracket 90° Flat	CHW-S-XX35-B90F																					
Bracket 90° Raised	CHW-S-XX35-B90R																					
End Cap for FLEX AC	CHW-S-3535-ECAC																					
Mounting Clip for FLEX AC	CHW-S-3535-MCAC																					
VHB Tape	VHBTAPE.AC																					




- A:** 1.39" (35.25mm)
- B:** 0.96" (24.50mm)
- C:** 1.39" (35.25mm)
- D:** 1.54" (39.00mm)

*Must specify for hanging or surface mount application.

CHW-R-4435



MATERIAL	Anodized Aluminum																			
DESCRIPTION	Wide and deep recessed channel. Eliminates visible LED nodes for most FLEXDC products when used with a milky lens. Can be securely and conveniently mounted with CHW-R-4435-SC spring clip.																			
LENGTH	2 meter																			
LENS TYPES	<table border="0"> <tr> <td>Frosted</td> <td>CHW-35mm-CF</td> </tr> <tr> <td>Milky</td> <td>CHW-35mm-CM</td> </tr> </table>		Frosted	CHW-35mm-CF	Milky	CHW-35mm-CM														
Frosted	CHW-35mm-CF																			
Milky	CHW-35mm-CM																			
ACCESSORIES	<table border="0"> <tr> <td>Endcap</td> <td>CHW-R-4435-EC</td> </tr> <tr> <td>Endcap w/hole</td> <td>CHW-R-4435-ECH</td> </tr> <tr> <td>Mounting Clip</td> <td>CHW-R-4435-SC</td> </tr> <tr> <td>Bracket Straight</td> <td>CHW-S-XX35-B5</td> </tr> <tr> <td>Bracket 90° Flat</td> <td>CHW-S-XX35-B90F</td> </tr> <tr> <td>Bracket 90° Raised</td> <td>CHW-S-XX35-B90R</td> </tr> <tr> <td>End Cap for FLEX AC</td> <td>CHW-R-4435-ECAC</td> </tr> <tr> <td>Mounting Clip for FLEX AC</td> <td>CHW-R-4435-MCAC</td> </tr> <tr> <td>VHB Tape</td> <td>VHBTAPE.AC</td> </tr> </table>		Endcap	CHW-R-4435-EC	Endcap w/hole	CHW-R-4435-ECH	Mounting Clip	CHW-R-4435-SC	Bracket Straight	CHW-S-XX35-B5	Bracket 90° Flat	CHW-S-XX35-B90F	Bracket 90° Raised	CHW-S-XX35-B90R	End Cap for FLEX AC	CHW-R-4435-ECAC	Mounting Clip for FLEX AC	CHW-R-4435-MCAC	VHB Tape	VHBTAPE.AC
Endcap	CHW-R-4435-EC																			
Endcap w/hole	CHW-R-4435-ECH																			
Mounting Clip	CHW-R-4435-SC																			
Bracket Straight	CHW-S-XX35-B5																			
Bracket 90° Flat	CHW-S-XX35-B90F																			
Bracket 90° Raised	CHW-S-XX35-B90R																			
End Cap for FLEX AC	CHW-R-4435-ECAC																			
Mounting Clip for FLEX AC	CHW-R-4435-MCAC																			
VHB Tape	VHBTAPE.AC																			




- A:** 1.39" (35.25mm)
- B:** 0.96" (24.50mm)
- C:** 1.39" (35.25mm)
- D:** 2.00" (51.04mm)

CHW-S/H-2027



MATERIAL	Anodized Aluminum													
DESCRIPTION	Small surfaced mounted or hanging channel with wrap around lens.													
LENGTH	2 meter													
LENS TYPES	<table border="0"> <tr> <td>Clear</td> <td>CHW-SH-2027-CC</td> </tr> <tr> <td>Frosted</td> <td>CHW-SH-2027-CF</td> </tr> <tr> <td>Milky</td> <td>CHW-SH-2027-CM</td> </tr> </table>		Clear	CHW-SH-2027-CC	Frosted	CHW-SH-2027-CF	Milky	CHW-SH-2027-CM						
Clear	CHW-SH-2027-CC													
Frosted	CHW-SH-2027-CF													
Milky	CHW-SH-2027-CM													
ACCESSORIES	<table border="0"> <tr> <td>Endcap</td> <td>CHW-SH-2027-EC</td> </tr> <tr> <td>End Cap w/hole</td> <td>CHW-SH-2027-ECH</td> </tr> <tr> <td>Hanging Hardware</td> <td>CHW-SH-MW</td> </tr> <tr> <td>Bracket Straight</td> <td>CHW-SH-B5</td> </tr> <tr> <td>Bracket 90° Flat</td> <td>CHW-SH-B90F</td> </tr> <tr> <td>Bracket 90° Raised</td> <td>CHW-SH-B90R</td> </tr> </table>		Endcap	CHW-SH-2027-EC	End Cap w/hole	CHW-SH-2027-ECH	Hanging Hardware	CHW-SH-MW	Bracket Straight	CHW-SH-B5	Bracket 90° Flat	CHW-SH-B90F	Bracket 90° Raised	CHW-SH-B90R
Endcap	CHW-SH-2027-EC													
End Cap w/hole	CHW-SH-2027-ECH													
Hanging Hardware	CHW-SH-MW													
Bracket Straight	CHW-SH-B5													
Bracket 90° Flat	CHW-SH-B90F													
Bracket 90° Raised	CHW-SH-B90R													




- A:** 0.79" (20.30mm)
- B:** 0.66" (16.70mm)
- C:** 1.06" (27.00mm)
- D:** 0.76" (19.50mm)

*Must specify for hanging or surface mount application.

CHW-S/H-3561



MATERIAL	Anodized Aluminum													
DESCRIPTION	Large surface mounted or hanging channel with wrap around lens.													
LENGTH	2 meter													
LENS TYPES	<table border="0"> <tr> <td>Milky</td> <td>CHW-SH-3561-CM</td> </tr> </table>		Milky	CHW-SH-3561-CM										
Milky	CHW-SH-3561-CM													
ACCESSORIES	<table border="0"> <tr> <td>Endcap</td> <td>CHW-SH-3561-EC</td> </tr> <tr> <td>End Cap w/hole</td> <td>CHW-SH-3561-ECH</td> </tr> <tr> <td>Hanging Hardware</td> <td>CHW-SH-MW</td> </tr> <tr> <td>Bracket Straight</td> <td>CHW-SH-B5</td> </tr> <tr> <td>Bracket 90° Flat</td> <td>CHW-SH-B90F</td> </tr> <tr> <td>Bracket 90° Raised</td> <td>CHW-SH-B90R</td> </tr> </table>		Endcap	CHW-SH-3561-EC	End Cap w/hole	CHW-SH-3561-ECH	Hanging Hardware	CHW-SH-MW	Bracket Straight	CHW-SH-B5	Bracket 90° Flat	CHW-SH-B90F	Bracket 90° Raised	CHW-SH-B90R
Endcap	CHW-SH-3561-EC													
End Cap w/hole	CHW-SH-3561-ECH													
Hanging Hardware	CHW-SH-MW													
Bracket Straight	CHW-SH-B5													
Bracket 90° Flat	CHW-SH-B90F													
Bracket 90° Raised	CHW-SH-B90R													



- A:** 1.38" (35.00mm)
- B:** 1.24" (31.40mm)
- C:** 2.43" (61.70mm)
- D:** 1.57" (39.90mm)

*Must specify for hanging or surface mount application.

MOUNTING OPTIONS - COMPATIBLE CHANNELS



Not Blended



Blended w/Milky Lens

CHW-S/H-7532




MATERIAL
Anodized Aluminum

DESCRIPTION
Wide surface mounted or hanging channel with flat lens.

LENGTH
2 meter

LENS TYPES
Frosted CHW-SH-7532-CF

ACCESSORIES
Endcap CHW-SH-7532-EC
Endcap w/hole CHW-SH-7532-ECH
Hanging Hardware CHW-SH-MW
Bracket Straight CHW-SH-BS
Bracket 90° Flat CHW-SH-B90F
Bracket 90° Raised CHW-SH-B90R



A: 2.95" (75.00mm)
B: 2.52" (64.00mm)
C: 1.26" (32.00mm)

**Must specify for hanging or surface mount application.*

CHW-S-2623




MATERIAL
Anodized Aluminum

DESCRIPTION
Surface mounted channel with wrap around lens.

LENGTH
2 meter

LENS TYPES
Milky CHW-S-2623-CM

ACCESSORIES
Endcap CHW-S-2623-EC
Endcap w/hole CHW-S-2623-ECH



A: 1.03" (26.20mm)
B: 0.80" (20.35mm)
C: 0.89" (22.76mm)

CHW-S/H-3030




MATERIAL
Anodized Aluminum

DESCRIPTION
Wide and deep surface mounted or hanging channel with flat lens for even blending.

LENGTH
2 meter

LENS TYPES
Milky CHW-SH-3030-CM

ACCESSORIES
Endcap CHW-SH-3030-EC
Endcap w/hole CHW-SH-3030-ECH
Hanging Hardware CHW-SH-MW
Bracket Straight CHW-SH-BS
Bracket 90° Flat CHW-SH-B90F
Bracket 90° Raised CHW-SH-B90R
End Cap for FLEX AC CHW-SH-3030-ECAC
Mounting Clip for FLEX AC CHW-SH-3030-MCAC
VHB Tape VHBTAPE.AC



A: 1.18" (30.00mm)
B: 1.01" (25.60mm)
C: 1.18" (30.00mm)

**Must specify for hanging or surface mount application.*

CHC-S-1921



MATERIAL
Anodized Aluminum


DESCRIPTION
Surface mount channel with flat lens. Mounts to ferrous and non-ferrous surfaces using magnets with no visible fasteners once mounted.

LENGTH
2 meter

LENS TYPES
Milky CHC-S-1921-CM

ACCESSORIES

Anodized Aluminum Endcap CHC-S-1921-EC
Anodized Aluminum Endcap w/hole CHC-S-1921-ECH
Channel Mounted Magnet CHC-S-1921-MA
Wall Mounted Magnet CHC-S-1921-M
1' Mounting Plate CHC-S-1921-B1






A: 0.76" (19.43mm)
B: 0.55" (14.09mm)
C: 0.84" (21.43mm)

ACCESSORIES




LC-I2P-M

Indoor Lead Connector
(Male)






LC-I2P-F

Indoor Lead Connector
(Female)






LC-O2P-F

Outdoor Lead Connector
(Female)






LC-O2P-M

Outdoor Lead Connector
(Male)






FLEX.ZIP

Strain Relief Clip






FLEXMNT.SIL.INT

Indoor Mounting Clip



FLEXMNT.SIL.EXT12


Outdoor Mounting Clip



ACCESSORIES

FLEXDC.PFC.02.08

Field installed FLEX Connect® power feed
- 2 Conductor for 8mm Strip




Fits in all channel **except**:

- CHS-R-1208
- CHS-S-1208
- CHS-R-1715
- CHS-S-1715
- CHC-S-1921
- CHSP-R-2970
- CHSP-S-1618
- CHSP-STEP-8142

FLEXDC.BSC.02.08

Field installed FLEX Connect® butt splice -
2 Conductor for 8mm Strip




Fits in all channel **except**:

- CHS-R-1208
- CHS-S-1208
- CHS-R-1715
- CHS-S-1715
- CHC-S-1921
- CHSP-R-2970
- CHSP-S-1618
- CHSP-STEP-8142


LO-18G-2C-W-72

6' wire lead for FLEX Connect®
(not in-wall rated)




LP-18G-2C-W-72

6' Plenum rated wire lead for
FLEX Connect™




LO-18G-2C-W-SP

1000' spool of wire for
FLEX Connect® (not in-wall rated)



LP-18G-2C-W-SP


500' box of Plenum rated wire for
FLEX Connect®



CONFIGURATION TYPES


① FLEX cut to length with FLEX Connect® Power Feeds for Field Termination, Channel uncut for field cutting

- Specify **FLEXConfig-1**
- Specify FLEX type and channel type
- FLEX factory cut to length, but not terminated
- One FLEX Connect® power feed connector and 6' lead provided per FLEX run
 - Uncut rolls of lead wire can also be provided (see page 8 for part #)
- Channel shipped uncut for field cutting.
- Specify number of butt splices (not shown - see page 8)
- IP68 not available in **FLEXConfig-1**
- JA8 2016 not available in **FLEXConfig-1**
- FLEXConfig-1** is quick ship if run lengths are provided at time of order. Take offs, if needed, will add lead time.
- The below channels are **NOT** compatible with FLEX Connect®:
 - Slim:**
 - CHS-R-1208
 - CHS-S-1208
 - CHS-R-1715
 - CHS-S-1715
 - CHS-C-1616
 - CHC-S-1921
 - Specialty:**
 - CHSP-R-2970
 - CHSP-S-1618
 - CHSP-STEP-8142

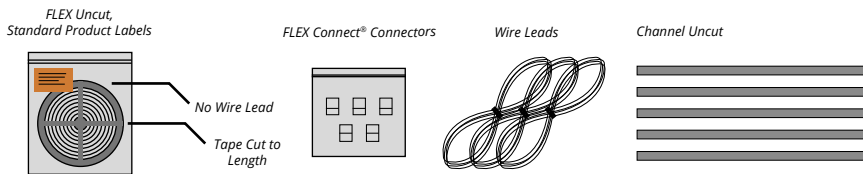


② Cut To Length With Soldered Leads, Assemble On-Site^{1, 2, 3}

- Specify **FLEXConfig-2**
- Specify FLEX type and channel type
- Specify run lengths
- IP68 only available in **FLEXConfig-2**
- If no config is specified, and run lengths are provided, **FLEXConfig-2** will be used

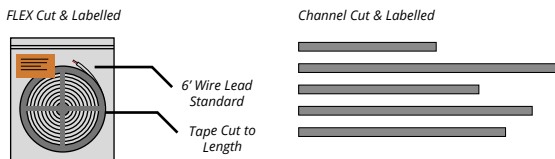

③ Pre-Assembled Factory Finished Fixtures^{1, 2}


- Specify **FLEXConfig-3**
- Fully assembled fixture
- ETL stamped and listed as a fixture
- 6.50' max length
- Standard 6' power lead unless otherwise specified
- The below channels **CANNOT** be factory assembled:
 - Slim:**
 - CHS-R-1208
 - CHS-R-1715
 - Wide:**
 - CHW-R-2010
 - CHW-S-2027
 - CHW-S-7532
 - CHW-S-2623
 - CHW-S-3030
 - CHW-S-3561

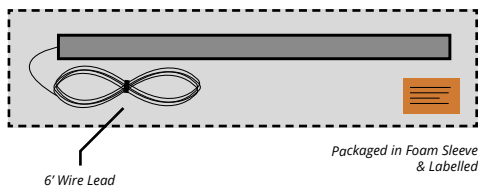

NOTES:

- Due to the nature of the FLEX DC® product, specific lengths may not fall exactly on a cutting point. In this case, Optic Arts® will always cut to the smaller dimension unless otherwise specified.
- Unless otherwise specified, channel is cut 15mm longer than FLEX DC®.
- Some on-site assembly required. See installation guides for details.

COMPATIBLE DRIVERS

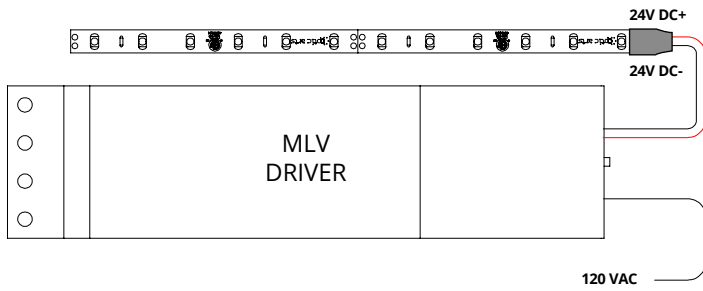

MLV (MLV)

PART	DESCRIPTION
ML10S24VDC	10W 120VAC DIMMABLE DRIVER
ML20S24VDC	20W 120VAC DIMMABLE DRIVER
ML35S24VDC	35W 120VAC DIMMABLE DRIVER
ML35S24VDC-277	35W 277VAC DIMMABLE DRIVER
ML40S24VDC	40W 120VAC DIMMABLE DRIVER
ML50S24VDC	50W 120VAC DIMMABLE DRIVER
ML50S24VDC-277	50W 277VAC DIMMABLE DRIVER
ML60S24VDC	60W 120VAC DIMMABLE DRIVER
ML75S24VDC	75W 120VAC DIMMABLE DRIVER
ML75S24VDC-277	75W 277VAC DIMMABLE DRIVER
ML96S24VDC	96W 120VAC DIMMABLE DRIVER
ML96S24VDC-277	96W 120VAC DIMMABLE DRIVER
EM2-200S24DC	200W 120VAC DIMMABLE DRIVER, 2 96W CIRCUITS
EM3-300S24DC	300W 120VAC DIMMABLE DRIVER, 3 96W CIRCUITS
EM2-200S24DC-277	200W 120VAC DIMMABLE DRIVER, 2 96W CIRCUITS
EM3-300S24DC-277	288W 120VAC DIMMABLE DRIVER, 3 96W CIRCUITS


DIMENSIONS

10W-50W	H 2.11"; W 7.38"; D 1.60"
60W-96W	H 3.93"; W 8.13"; D 1.59"
200-300W	H 5.69"; W 10.29"; D 3.13"

DIMMING PERFORMANCE

MLV DRIVER	Dims to 20% on most MLV dimmers
<i>NOTE: Must be loaded between 75%-100% of rated load to maintain FLEX DC® warranty</i>	

120 VAC WIRING

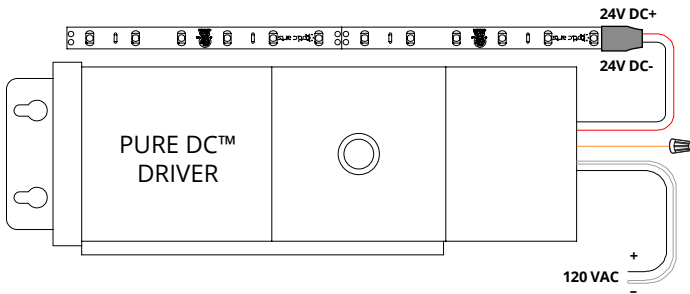

PURE DC™ MLV (PDC)

PART	DESCRIPTION
PDC.40.24	40W 120/277VAC PURE DC™ MLV DIMMABLE DRIVER
PDC.96.24	96W 120/277VAC PURE DC™ MLV DIMMABLE DRIVER


DIMENSIONS

40W	L 14.25"; W 3.00"; H 2.88"
96W	L 14.75"; W 4.31"; H 4.81"


DIMMING PERFORMANCE

PURE DC™ DRIVER	Dims to 0.1% on most MLV dimmers
-----------------	----------------------------------

277 VAC WIRING

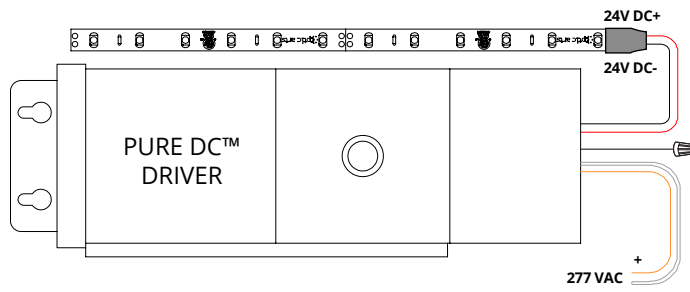


COMPATIBLE DRIVERS

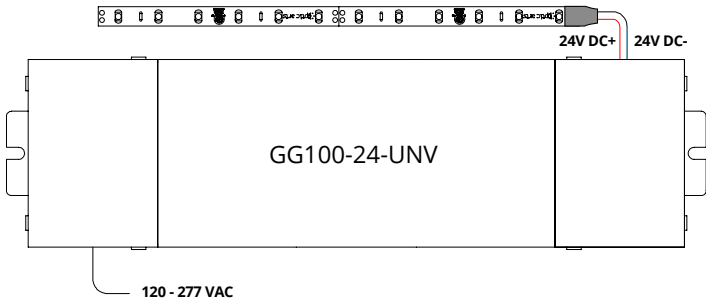

ELECTRONIC DRIVER - NON-DIM (ND)

PART	DESCRIPTION
GG100E-24-UNV	96W 120-277VAC ELECTRONIC DRIVER
DIMENSIONS	
ELECTRONIC DRIVER	H 3.00"; W 11.46"; D 1.30"
DIMMING PERFORMANCE	
ELECTRONIC DRIVER	Non-Dim

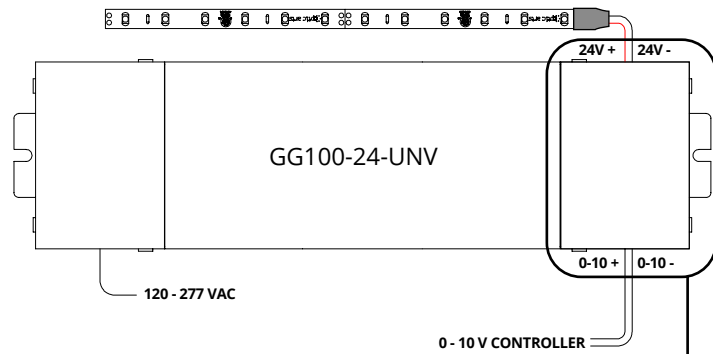


ELECTRONIC DRIVER W/O-10V MODULE (010)


PART	DESCRIPTION
GG100E-24-UNV-010V	96W 120-277VAC ELECTRONIC DRIVER WITH 0-10V DIMMING MODULE (SINK)
DIMENSIONS	
ELECTRONIC DRIVER - 0-10V	H 3.00"; W 11.46"; D 1.30"
DIMMING PERFORMANCE	
ELECTRONIC DRIVER - 0-10V	Dims below 1% on most 0-10V dimmers

FIELD INSTALLED IN LOW VOLTAGE WIRING COMPARTMENT

- Install DIM-010V Module in low voltage wiring compartment.
- Max number of 25 modules on one dimmer. Consult dimmer datasheet for maximum device limitation of a specific controller.

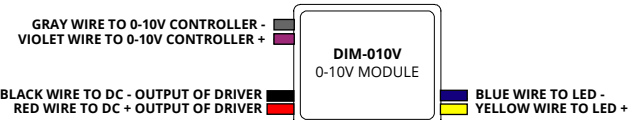

COMPATIBLE DRIVERS

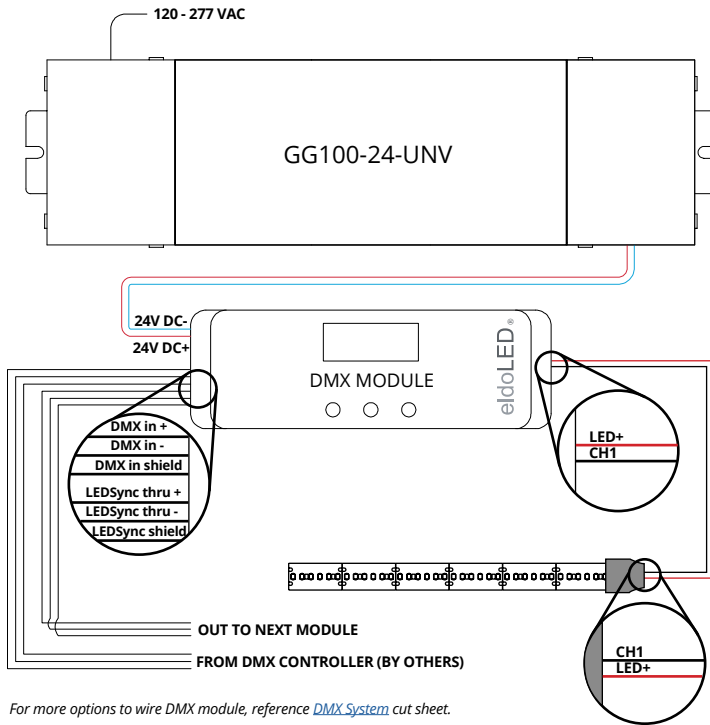

For more options to wire DMX module, reference [DMX System](#) cut sheet.

ELECTRONIC DRIVER W/DMX MODULE (DMX)

PART	DESCRIPTION
GG100E-24-UNV-DMX	96W 120-277VAC ELECTRONIC DRIVER WITH eldoLED DMX DIMMING MODULE

DIMENSIONS

96W	H 3.00"; W 11.46"; D 1.30"
DMX MODULE	H 1.97"; W 6.02"; D 0.91"


*Must be installed in UL box (by others)

DIMMING PERFORMANCE


ELECTRONIC DRIVER - DMX MODULE	Dims to 0.1% on most DMX systems
--------------------------------	----------------------------------

COMPATIBLE DRIVERS

DIMMER WITH NEUTRAL

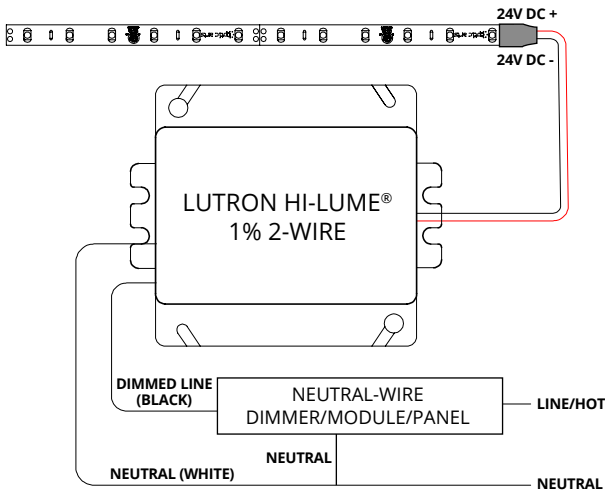

DIMMER WITHOUT NEUTRAL

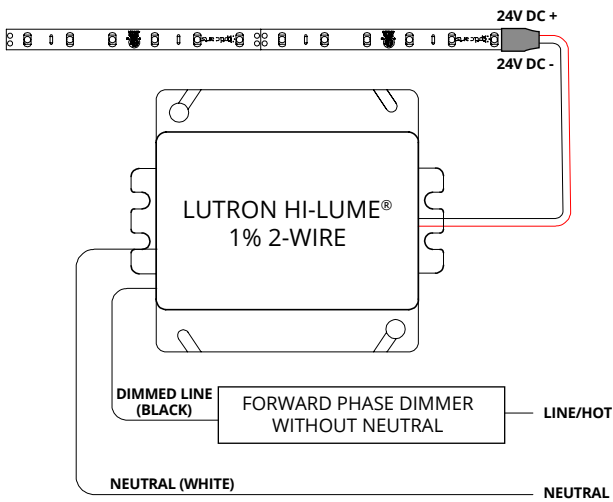


LUTRON HI-LUME® 1% 2-WIRE: 2-WIRE CONTROL FORWARD PHASE




PART	DESCRIPTION
LTEA4U1UKL-CV240	5-40W, 120VAC, 2-WIRE FORWARD PHASE DRIVER
DIMENSIONS	
LUTRON HI-LUME® 1% 2-WIRE	H 4.00"; W 4.89"; D 2.62"
DIMMING PERFORMANCE	
LUTRON HI-LUME® 1% 2-WIRE	Dims to 1% with compatible Lutron controls

COMPATIBLE DRIVERS

3-WIRE

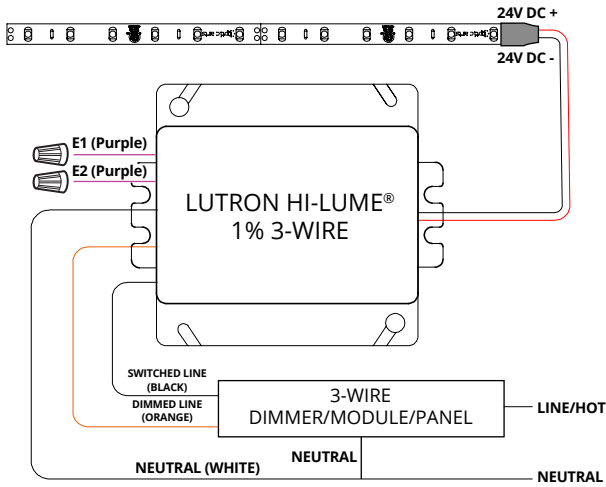

ECOSYSTEM

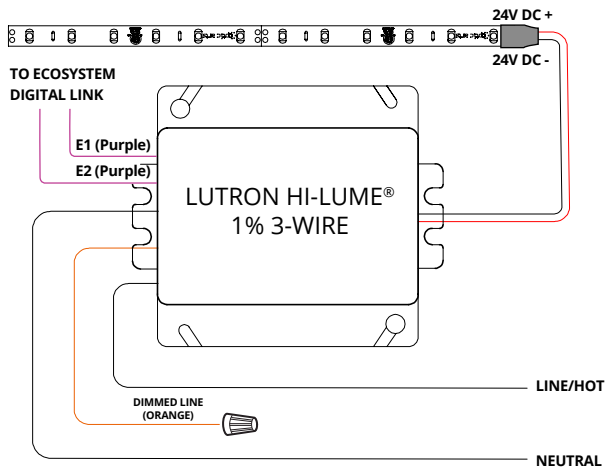


LUTRON HI-LUME® 1%: 3-WIRE/ECOSYSTEM



PART	DESCRIPTION
L3DA4U1UKL-CV240	5-40W, 120-277VAC, 3-WIRE/ECOSYSTEM DRIVER
DIMENSIONS	
LUTRON HI-LUME® 1% 3-WIRE/ ECOSYSTEM	H 4.00"; W 4.89"; D 2.62"
DIMMING PERFORMANCE	
LUTRON HI-LUME® 1% 3-WIRE/ ECOSYSTEM	Dims to 1% with compatible Lutron controls

COMPATIBLE DRIVERS

3-WIRE

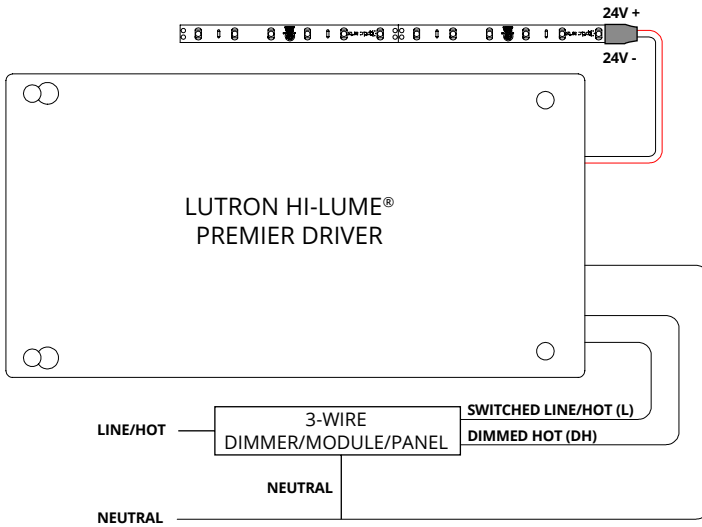

LUTRON HI-LUME® PREMIER: 3-WIRE/ECOSYSTEM



PART	DESCRIPTION
L3D0-96W24V-U	2-96W, 120-277VAC, 3-WIRE/ECOSYSTEM DRIVER

DIMENSIONS	
HI-LUME® PREMIER	H 5.5"; W 10.5"; D 2.0"

DIMMING PERFORMANCE	
LUTRON HI-LUME® PREMIER	Dims to 0.1% with compatible Lutron controls
<i>NOTE: Lutron soft-on, fade to black technology available with Ecosystem Digital Control only.</i>	

ECOSYSTEM

