

FLEX QUICK SHEET


FLEX DC 15

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 1.5
Max Run: IP40 - 64', IP68 - 20'
Cutable Increment: Every 3.96"

Also Available in: Red, Green, Blue, Amber, UV

COLOR	LUMENS/FT
2400K	113.67
2700K	133.47
3000K	134.07
3500K	141.31
4100K	144.41
6000K	140.01

**Stated lumen values have a tolerance of +/- 10%.*




FLEX DC 22

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 2.2
Max Run: IP40 - 43', IP68 - 20'
Cutable Increment: Every 6.55"

Also Available in: Red, Green, Blue, Amber, UV, RGB

COLOR	LUMENS/FT
2400K	150.00
2700K	154.00
3000K	176.00
3500K	161.00
4100K	157.00
6000K	169.00

**Stated lumen values have a tolerance of +/- 10%.*




FLEX DC 30

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 3.0
Max Run: IP40 - 32', IP68 - 20'
Cutable Increment: Every 1.97"

Also Available in: Red, Green, Blue, Amber, UV

COLOR	LUMENS/FT
2400K	230.22
2700K	262.59
3000K	265.65
3500K	276.03
4100K	286.77
6000K	272.94

**Stated lumen values have a tolerance of +/- 10%.*




FLEX DC 44

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 4.4
Max Run: IP40 - 21', IP68 - 20'
Cutable Increment: Every 3.89"

Also Available in: Red, Green, Blue, Amber, UV

COLOR	LUMENS/FT
2400K	320.54
2700K	367.44
3000K	371.09
3500K	398.72
4100K	392.39
6000K	413.68

**Stated lumen values have a tolerance of +/- 10%.*

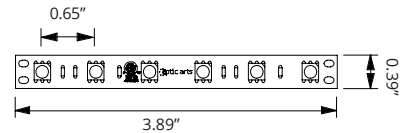


FLEX DC 88

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 8.8
Max Run: IP40 - 10', IP68 - 20'
Cutable Increment: Every 1.97"

Also Available in: Red, Green, Blue, Amber, UV

COLOR	LUMENS/FT
2400K	649.50
2700K	762.08
3000K	783.55
3500K	840.31
4100K	813.12
6000K	838.20

**Stated lumen values have a tolerance of +/- 10%.*



FLEX QUICK SHEET


FLEX DC RADIUS

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 3.0
Max Run: IP40 - 32'
Cuttible Increment: Every 4.88"

Also Available in: Red, Green, Blue, Amber, UV

COLOR	LUMENS/FT
2400K	215.18
2700K	254.82
3000K	256.34
3500K	261.16
4100K	253.90
6000K	251.83

**Stated lumen values have a tolerance of +/- 10%.*



FLEX DC QUAD

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 5.5
Max Run: IP40 - 17', IP68 - 20'
Cuttible Increment: Every 6.55"

COLOR	LUMENS/FT
RGB+3000K	293.00
RGB+6000K	283.00

**Stated lumen values have a tolerance of +/- 10%.*



FLEX DC 44 RGB

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 4.4
Max Run: IP40 - 21', IP68 - 20'
Cuttible Increment: Every 3.89"

COLOR	LUMENS/FT
All LEDs at 100%	164.63

**Stated lumen values have a tolerance of +/- 10%.*




FLEX DC 44 RGBA/W

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 4.4
Max Run: IP40 - 21', IP68 - 20'
Cuttible Increment: Every 6.55"

COLOR	LUMENS/FT
RGB+3000K	286.66
RGB+6000K	276.66
RGB+Amber	145.11

**Stated lumen values have a tolerance of +/- 10%.*

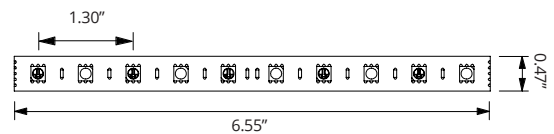


FLEX DC 88 RGBA/W

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 8.8
Max Run: IP40 - 10', IP68 - 20'
Cuttible Increment: Every 3.86"

COLOR	LUMENS/FT
RGB+3000K	438.00
RGB+6000K	373.00
RGB+Amber	238.00

**Stated lumen values have a tolerance of +/- 10%.*

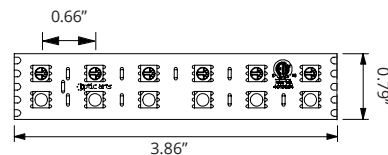


FLEX QUICK SHEET

FLEX DC 88 RGB

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 8.8
Max Run: IP40 - 10', IP68 - 20'
Cutable Increment: Every 1.96"

COLOR	LUMENS/FT
All LEDs at 100%	347.61

*Stated lumen values have a tolerance of +/- 10%.




FLEX AC 4

IP Rating: 65
Voltage: 120
Watts/Ft: 4.5
Max Run: IP65 - 100'
Cutable Increment: Every 12.00"

COLOR	LUMENS/FT
3000K	354.00

*Stated lumen values have a tolerance of +/- 10%.

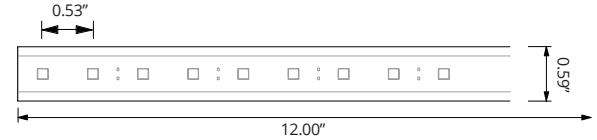


FLEX DC VARIABLE WHITE

IP Rating: 40 or 68
Voltage: 24
Watts/Ft: 3
Max Run: IP40: 32', IP68: 20'
Cutable Increment: Every 3.89"

COLOR	LUMENS/W
Variable	60.50

*Stated lumen values have a tolerance of +/- 10%.




FLEX DC SIDE EMITTING

IP Rating: 40 or 67
Voltage: 24
Watts/Ft: 2.9
Max Run: IP40: 33', IP68: 20'
Cutable Increment: Every 1.97"

COLOR	LUMENS/F
2700K	140.00
3000K	142.00
6000K	146.00

*Stated lumen values have a tolerance of +/- 10%.




FLEX STP 73

IP Rating: 20
Voltage: 24
Watts/Ft: 7.3
Max Run: 13'
Cutable Increment: Every 0.79"

COLOR	LUMENS/F
1800K	Preliminary
2750K	446.00
2900K	453.00
3550K	524.00

*Stated lumen values have a tolerance of +/- 10%.




FLEX QUICK SHEET

FLEX STP RGBW

IP Rating: 20
Voltage: 24
Watts/Ft: 5.0
Max Run: 19'
Cutable Increment: Every 2.46"

COLOR	LUMENS/F
RGBW27	Preliminary




**Stated lumen values have a tolerance of +/- 10%.*

FLEX STP VARIABLE WHITE

IP Rating: 20
Voltage: 24
Watts/Ft: 5.8
Max Run: 16'
Cutable Increment: Every 1.97"

COLOR	LUMENS/F
1800k-3550k Variable	Preliminary



**Stated lumen values have a tolerance of +/- 10%.*