



- **Driver Type:** CV (Constant Voltage)
- **Number of Outputs:** 1
- **Damp Location:** Indoor use only (dry and damp locations)
- **Dimming:** 100% - 0.1% with Soft On, Fade-to-Black Technology
- **Output Power:** 96W
- **Universal Input Voltage Range:** 120-277 VAC
- **Operating Temperature:** 0 to 40°C

NOTE: Lutron soft-on, fade to black technology available with Ecosystem Digital Control only.

INPUT

Voltage Range	120-277 VAC
Frequency Range	50/60Hz
Power Factor	>0.95 at full load
AC Current	0.92A @120V; 0.40A @ 277V

OUTPUT

Max Power	2-96 Watts
Max Current	0 - 4A
Voltage	24V

PART

PART #	DESCRIPTION
L3D0-96W24V-U	25-96W, 120-277VAC, 3-WIRE/ ECOSYSTEM DRIVER

ENVIRONMENTAL

Sound Rated	Class A inaudible in 24 dBA ambient
Relative Humidity	Maximum 90% non-condensing

OTHER

Length (L)	5.5"
Width (W)	2"
Height (H)	10.5"
Working Temp. Range	0 to 40°C
Warranty	5 years

WIRE SPECS

Input	#20-12AWG
Output	#20-12AWG

DIMMING PERFORMANCE

LUTRON HI-LUME® PREMIER	Dims to 0.1% with compatible Lutron controls
--------------------------------	--

PART NUMBER BUILDER

L3D0	+	96 - 96W	+	24 - 24V	+	U - Universal
SERIES		OUTPUT VOLTAGE		INPUT VOLTAGE		CASE STYLE


1130 Monterey Pass Rd, Monterey Park, CA 91754
 213.250.6069 | customerservice@opticarts.com | www.opticarts.com

Optic Arts reserves the right to modify this specification without prior notice.
 Last Modified: September 11, 2018 7:45 AM



WIRING DIAGRAMS

3-WIRE

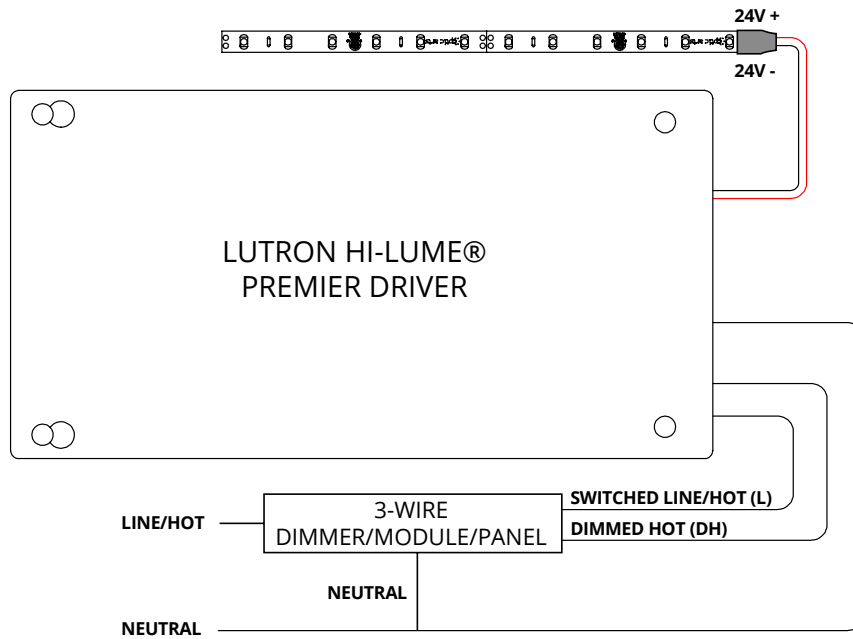

ECOSYSTEM

