



**FLEX DC® 88** is a high performance flexible LED fixture suitable for use in coves, under cabinets, in shelves, and virtually anywhere a linear fixture is required.

## ELECTRICAL

<b>Input Voltage</b>	24VDC
<b>Dimming Options</b>	<ul style="list-style-type: none"> <li>• PURE DC™</li> <li>• MLV</li> <li>• 0-10 Volts</li> <li>• DMX</li> <li>• Lutron (2-WIRE, 3-WIRE, EcoSystem)</li> </ul>
<b>Power Consumption</b>	8.8 Watts per foot
<b>Wire Size</b>	18AWG, 2 wire
<b>Certification</b>	<b>ETL</b> - Conforms to UL Std. 2108; Certified to CSA Std. C22.2 No. 9.0 <b>Title 24</b> - Selected models are JA8 2016 compliant when used with 0-10V, DMX, or Lutron Premier dimming. JA8 option must be specified in part number builder below.

## PHYSICAL

<b>Field Cuttable</b>	Every 1.97"
<b>Operating Temperature</b>	-40° C (-40°F) to +70°C (+158°F)
<b>Environment</b>	<b>IP40</b> - Dry Location <b>IP68</b> - Wet Location
<b>Maximum Class 2 Run Length</b>	<b>IP40:</b> 10', <b>IP68:</b> 10'
<b>Dimensions (W x H):</b>	<b>IP40</b> - 0.63" (15.88mm) x 0.13" (3.18mm) <b>IP68</b> - 0.69" (17.47mm) x 0.25" (6.35mm) <b>IP68 Endcaps</b> - 0.33" (8.40mm) x 0.77" (30.17mm)

## ACCESSORIES

<b>Channels</b>	Optic Arts® Channel (pg. 3-5)
<b>Connectors</b>	LC-I2P-M, LC-I2P-F, LC-O2P-F, LC-O2P-M (Pg. 5)

*Note: FLEX DC® 88 must be used in conjunction with Optic Arts® Channel for proper heat dissipation.*

## LUMEN OUTPUT

<b>2000K</b> (IP40 only)	465.74 lm/ft 54.51 lm/Watt
<b>2400K</b>	649.50 lm/ft 73.81 lm/Watt
<b>2400K JA8 2016</b> (IP40 only) <sup>1</sup>	649.50 lm/ft 73.81 lm/Watt
<b>2700K</b>	762.08 lm/ft 86.60 lm/Watt
<b>3000K</b>	783.55 lm/ft 89.04 lm/Watt
<b>3000K JA8 2016</b> (IP40 only) <sup>1</sup>	783.55 lm/ft 89.04 lm/Watt
<b>3500K</b>	840.31 lm/ft 95.49 lm/Watt
<b>4100K</b>	813.12 lm/ft 92.40 lm/Watt
<b>6000K</b>	838.20 lm/ft 95.25 lm/Watt

*Note: Stated lumen values have a tolerance of +/- 10%.  
 1: Must be used with 0-10V, DMX, or Lutron Premier dimming.*

## PERFORMANCE

<b>CRI</b>	90+
<b>Lumen Maintenance</b>	50,000 Hours
<b>Binning Tolerance</b>	+/- 100K
<b>Warranty</b>	5 years

## PART NUMBER BUILDER

SERIES	+	IP RATING	+	COLOR	+	VOLTAGE	+	WATTAGE	+	CONFIGURATION	+	LENGTH
FLEXDC		<b>40</b> = IP40 - Dry Location <b>68</b> = IP68 - Wet Location		<b>20</b> = 2000K (IP40 only) <b>24</b> = 2400K <b>24J</b> = 2400K JA8 2016 (IP40 only) <sup>1</sup> <b>27</b> = 2700K <b>30</b> = 3000K <b>30J</b> = 3000K JA8 2016 (IP40 only) <sup>1</sup>		<b>24</b> = 24 VDC		<b>88</b> = 8.8W		<b>FLC1</b> = FLEX Config 1 <b>FLC2</b> = FLEX Config 2 <b>FLC3</b> = FLEX Config 3		<b>XX</b> = Custom Length

<sup>1</sup>: Must be used with 0-10V, DMX, or Lutron Premier dimming.





## DIMENSIONS

Optic Arts® cuts all FLEX DC® and Channel products to length per customer specifications. Each length of FLEX DC® is fitted with a 6' wire lead (custom lengths available upon request) and packaged on a reel in an anti-static bag. Bags are labeled with fixture type, length and location (if applicable). Each piece of channel is labeled with fixture type, length and location (if applicable), and is bundled by fixture type.

- Due to the nature of the FLEX DC® product, specific lengths may not fall exactly on a cutting point. In this case, Optic Arts® will always cut to the smaller dimension unless otherwise specified.
- Unless otherwise specified, channel is cut 15mm longer than FLEX DC®.
- Some on-site assembly required. See installation guides for details.



### INDOOR FLEX DC® 88

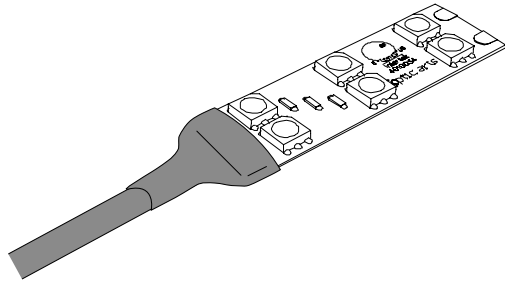

#### INDOOR DIMENSIONS

Width	0.59" (15.88mm)
Height	0.09" (2.21mm)
Cuttable Segment Length	1.97" (50.04mm)
Pitch Length	0.67" (17.47mm)
Max Run Length	10.00' (3048.00mm)

### OUTDOOR FLEX DC® 88

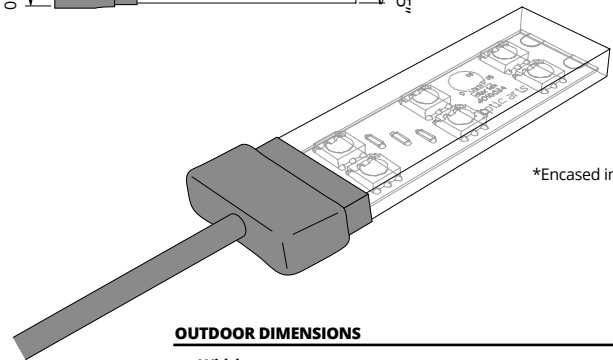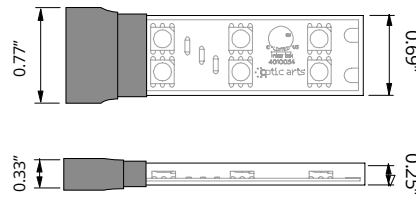


\*Encased in silicon


#### OUTDOOR DIMENSIONS

Width	0.69" (17.47mm)
Height	0.25" (6.35mm)
Width (Endcap)	0.77" (19.54mm)
Height (Endcap)	0.33" (8.40mm)
Max Run Length	10.00' (3048.00mm)

### INDOOR FLEX DC® 88

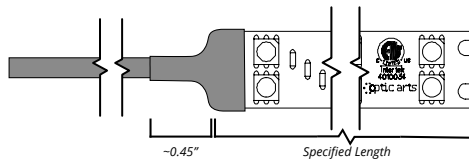

### OUTDOOR FLEX DC® 88

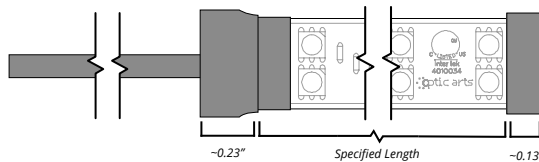

## KEY


### CHANNEL PART NUMBER BREAKDOWN:

CHS	+	R	+	1208
SERIES		APPLICATION		DIMENSIONS
CHS = Slim Channel CHW = Wide Channel		S = Surface Mount R = Recessed Mount C = Corner Mount H = Hanging Mount		XXXX = W x H (mm)


### CHS-R-1208

• Click on channel titles below to access complete channel cut sheets

### DIFFUSION LEVEL:

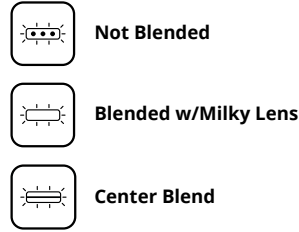


### CONFIGURATION:

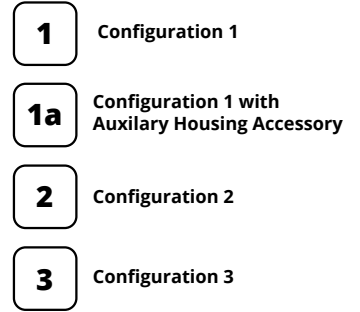

### CHS-S-1922S

Fits IP40 FLEX DC®



**A:** 0.77" (19.50mm)  
**B:** 0.65" (16.50mm)  
**C:** 0.86" (21.80mm)



#### MATERIAL

Anodized Aluminum

#### DESCRIPTION

**1** Slim surface mounted channel with square wrap around lens. Mounting clip is fully concealed within fixture base.

#### LENGTH

**2** 2 meter


#### LENS TYPES

**3** Milky CHW-S-1922S-CM

#### ACCESSORIES

Endcap CHW-S-1922S-EC  
Endcap w/hole CHW-S-1922S-ECH  
Mounting Clip CHW-S-1922S-MC

### CHS-S-1922R



**A:** 0.77" (19.50mm)  
**B:** 0.65" (16.50mm)  
**C:** 0.86" (21.80mm)



#### MATERIAL

Anodized Aluminum

#### DESCRIPTION

**1** Slim surface mounted channel with rounded wrap around lens. Mounting clip is fully concealed within fixture base.

#### LENGTH

**2** 2 meter


#### LENS TYPES

**3** Milky CHW-S-1922R-CM

#### ACCESSORIES

Endcap CHW-S-1922R-EC  
Endcap w/hole CHW-S-1922R-ECH  
Mounting Clip CHW-S-1922R-MC

### CHW-S-2010



**A:** 0.93" (23.50mm)  
**B:** 0.78" (20.00mm)  
**C:** 0.39" (10.00mm)  
**D:** 0.48" (12.19mm)  
**E:** 1.02" (25.80mm)



#### MATERIAL

Anodized Aluminum

#### DESCRIPTION

**1** Low profile surface mounted channel.

#### LENGTH

**2** 2 meter


#### LENS TYPES

**3** Clear CHW-S-2010-CC  
Frosted CHW-S-2010-CF  
Milky CHW-S-2010-CM

#### ACCESSORIES

Endcap CHW-S-2010-EC  
Endcap w/hole CHW-S-2010-ECH  
Mounting Clip CHW-S-2010-MC  
Rotating Mounting Clip CHW-S-2010-MCR

### CHW-R-2010



**A:** 0.93" (23.50mm)  
**B:** 0.78" (20.00mm)  
**C:** 0.39" (10.00mm)  
**D:** 1.19" (30.24mm)



#### MATERIAL

Anodized Aluminum

#### DESCRIPTION

**1** Recessed wide-profile channel.

#### LENGTH

**2** 2 meter

#### LENS TYPES

Clear CHW-R-2010-CC  
Frosted CHW-R-2010-CF  
Milky CHW-R-2010-CM

#### ACCESSORIES


Endcap CHW-R-2010-EC  
Endcap w/hole CHW-R-2010-ECH

## MOUNTING OPTIONS - COMPATIBLE CHANNELS

- Not Blended  
 Blended w/Milky Lens  
 **1** Configuration 1  
 **1a** Configuration 1 with Auxiliary Housing Accessory  
 **2** Configuration 2  
 **3** Configuration 3

### CHW-C-3030


\*Blends with IP20/40  
\*\* No Blend with IP65/67/68



**A:** 1.18" (30.00mm)  
**B:** 0.78" (20.20mm)  
**C:** 1.18" (30.00mm)  
**D:** 1.29" (32.77mm)  
**E:** 1.29" (32.77mm)

	<b>MATERIAL</b>	Anodized Aluminum
	<b>DESCRIPTION</b>	45 degree channel with rounded lens.
<b>1</b>	<b>LENGTH</b>	2 meter
<b>2</b>	<b>LENS TYPES</b>	Clear CHW-C-3030-CC Frosted CHW-C-3030-CF Milky CHW-C-3030-CM
<b>3</b>	<b>ACCESSORIES</b>	Endcap CHW-C-3030-EC Endcap w/hole CHW-C-3030-ECH Mounting Clip CHW-C-3030-MC


### CHW-C-3030S



**A:** 1.18" (30.00mm)  
**B:** 0.78" (20.20mm)  
**C:** 1.18" (30.00mm)  
**D:** 1.29" (32.77mm)  
**E:** 1.29" (32.77mm)

	<b>MATERIAL</b>	Anodized Aluminum
	<b>DESCRIPTION</b>	45 degree channel with square lens.
<b>1</b>	<b>LENGTH</b>	2 meter
<b>2</b>	<b>LENS TYPES</b>	Clear CHW-C-3030S-CC Frosted CHW-C-3030S-CF Milky CHW-C-3030S-CM
<b>3</b>	<b>ACCESSORIES</b>	Endcap CHW-C-3030S-EC Endcap w/hole CHW-C-3030S-ECH Mounting Clip CHW-C-3030S-MC

### CHW-S/H-3535




**A:** 1.39" (35.25mm)  
**B:** 0.96" (24.50mm)  
**C:** 1.39" (35.25mm)  
**D:** 1.54" (39.00mm)

\*Must specify for hanging or surface mount application.

	<b>MATERIAL</b>	Anodized Aluminum
	<b>DESCRIPTION</b>	Wide and deep surface mounted or hanging channel. Eliminates visible LED nodes for most FLEXDC products when used with a milky lens.
<b>1</b>	<b>LENGTH</b>	2 meter
<b>3</b>	<b>LENS TYPES</b>	Frosted CHW-35mm-CF Milky CHW-35mm-CM
	<b>ACCESSORIES</b>	Endcap CHW-S-3535-EC Endcap w/hole CHW-S-3535-ECH Mounting Clip CHW-S-3535-MC Hanging Hardware CHW-SH-3535-MW Bracket Straight CHW-S-XX35-BS Bracket 90° Flat CHW-S-XX35-B90F Bracket 90° Raised CHW-S-XX35-B90R End Cap for FLEX AC CHW-S-3535-ECAC Mounting Clip for FLEX AC CHW-S-3535-MCAC VHB Tape VHBTAPE.AC

### CHW-R-4435




**A:** 1.39" (35.25mm)  
**B:** 0.96" (24.50mm)  
**C:** 1.39" (35.25mm)  
**D:** 2.00" (51.04mm)

	<b>MATERIAL</b>	Anodized Aluminum
	<b>DESCRIPTION</b>	Wide and deep recessed channel. Eliminates visible LED nodes for most FLEXDC products when used with a milky lens. Can be securely and conveniently mounted with CHW-R-4435-SC spring clip.
<b>1</b>	<b>LENGTH</b>	2 meter
<b>2</b>	<b>LENS TYPES</b>	Frosted CHW-35mm-CF Milky CHW-35mm-CM
	<b>ACCESSORIES</b>	Endcap CHW-R-4435-EC Endcap w/hole CHW-R-4435-ECH Mounting Clip CHW-R-4435-SC Bracket Straight CHW-S-XX35-BS Bracket 90° Flat CHW-S-XX35-B90F Bracket 90° Raised CHW-S-XX35-B90R End Cap for FLEX AC CHW-R-4435-ECAC Mounting Clip for FLEX AC CHW-R-4435-MCAC VHB Tape VHBTAPE.AC

### CHW-S/H-2027

Fits IP40 FLEX DC®




**A:** 0.79" (20.30mm)  
**B:** 0.66" (16.70mm)  
**C:** 1.06" (27.00mm)  
**D:** 0.76" (19.50mm)

\*Must specify for hanging or surface mount application.

	<b>MATERIAL</b>	Anodized Aluminum
	<b>DESCRIPTION</b>	Small surfaced mounted or hanging channel with wrap around lens.
<b>1</b>	<b>LENGTH</b>	2 meter
<b>2</b>	<b>LENS TYPES</b>	Clear CHW-SH-2027-CC Frosted CHW-SH-2027-CF Milky CHW-SH-2027-CM
	<b>ACCESSORIES</b>	Endcap CHW-SH-2027-EC End Cap w/hole CHW-SH-2027-ECH Hanging Hardware CHW-SH-MW Bracket Straight CHW-SH-BS Bracket 90° Flat CHW-SH-B90F Bracket 90° Raised CHW-SH-B90R

### CHW-S/H-3561



**A:** 1.38" (35.00mm)  
**B:** 1.24" (31.40mm)  
**C:** 2.43" (61.70mm)  
**D:** 1.57" (39.90mm)


\*Must specify for hanging or surface mount application.

	<b>MATERIAL</b>	Anodized Aluminum
	<b>DESCRIPTION</b>	Large surface mounted or hanging channel with wrap around lens.
<b>1</b>	<b>LENGTH</b>	2 meter
<b>2</b>	<b>LENS TYPES</b>	Milky CHW-SH-3561-CM
	<b>ACCESSORIES</b>	Endcap CHW-SH-3561-EC End Cap w/hole CHW-SH-3561-ECH Hanging Hardware CHW-SH-MW Bracket Straight CHW-SH-BS Bracket 90° Flat CHW-SH-B90F Bracket 90° Raised CHW-SH-B90R

## MOUNTING OPTIONS - COMPATIBLE CHANNELS

-  Not Blended
  Blended w/Milky Lens
 **1** Configuration 1
**1a** Configuration 1 with Auxiliary Housing Accessory
**2** Configuration 2
**3** Configuration 3

### CHW-S/H-7532




- A:** 2.95" (75.00mm)
- B:** 2.52" (64.00mm)
- C:** 1.26" (32.00mm)

*\*Must specify for hanging or surface mount application.*



<b>MATERIAL</b>	_____
Anodized Aluminum	
<b>DESCRIPTION</b>	_____
Wide surface mounted or hanging channel with flat lens.	
<b>LENGTH</b>	_____
2 meter	
<b>LENS TYPES</b>	_____
Frosted	CHW-SH-7532-CF
<b>ACCESSORIES</b>	_____
Endcap	CHW-SH-7532-EC
Endcap w/hole	CHW-SH-7532-ECH
Hanging Hardware	CHW-SH-MW
Bracket Straight	CHW-SH-BS
Bracket 90° Flat	CHW-SH-B90F
Bracket 90° Raised	CHW-SH-B90R

### CHW-S-2623




- A:** 1.03" (26.20mm)
- B:** 0.80" (20.35mm)
- C:** 0.89" (22.76mm)



<b>MATERIAL</b>	_____
Anodized Aluminum	
<b>DESCRIPTION</b>	_____
Surface mounted channel with wrap around lens.	
<b>LENGTH</b>	_____
2 meter	
<b>LENS TYPES</b>	_____
Milky	CHW-S-2623-CM
<b>ACCESSORIES</b>	_____
Endcap	CHW-S-2623-EC
Endcap w/hole	CHW-S-2623-ECH

### CHW-S/H-3030



- A:** 1.18" (30.00mm)
- B:** 1.01" (25.60mm)
- C:** 1.18" (30.00mm)

*\*Must specify for hanging or surface mount application.*






<b>MATERIAL</b>	_____
Anodized Aluminum	
<b>DESCRIPTION</b>	_____
Wide and deep surface mounted or hanging channel with flat lens for even blending.	
<b>LENGTH</b>	_____
2 meter	
<b>LENS TYPES</b>	_____
Milky	CHW-SH-3030-CM
<b>ACCESSORIES</b>	_____
Endcap	CHW-SH-3030-EC
Endcap w/hole	CHW-SH-3030-ECH
Hanging Hardware	CHW-SH-MW
Bracket Straight	CHW-SH-BS
Bracket 90° Flat	CHW-SH-B90F
Bracket 90° Raised	CHW-SH-B90R
End Cap for FLEX AC	CHW-SH-3030-ECAC
Mounting Clip for FLEX AC	CHW-SH-3030-MCAC
VHB Tape	VHBTAPE.AC

## ACCESSORIES




### LC-I2P-M

Indoor Lead Connector  
(Male)






### LC-I2P-F

Indoor Lead Connector  
(Female)






### LC-O2P-F

Outdoor Lead Connector  
(Female)






### LC-O2P-M

Outdoor Lead Connector  
(Male)



### FLEX.ZIP


Strain Relief Clip



## CONFIGURATION TYPES


### ① [NOT COMPATIBLE] FLEX cut to length with FLEX Connect® Power Feeds for Field Termination, Channel uncut for field cutting

- Specify **FLEXConfig-1**
- Specify FLEX type and channel type
- FLEX factory cut to length, but not terminated
- One FLEX Connect® power feed connector and 6' lead provided per FLEX run
  - Uncut rolls of lead wire can also be provided (see page 8 for part #)
- Channel shipped uncut for field cutting.
- Specify number of butt splices (not shown - see page 8)
- IP68 not available in **FLEXConfig-1**
- JA8 2016 not available in **FLEXConfig-1**
- FLEXConfig-1** is quick ship if run lengths are provided at time of order. Take offs, if needed, will add lead time.
- The below channels are **NOT** compatible with FLEX Connect®:
  - Slim:**
    - CHS-R-1208
    - CHS-R-1715
    - CHS-C-1616
    - CHC-S-1921
  - Specialty:**
    - CHSP-R-2970
    - CHSP-S-1618
    - CHSP-STEP-8142

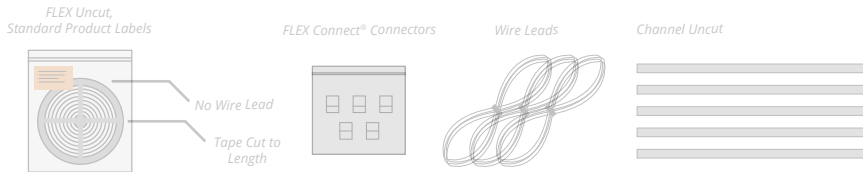


### ② Cut To Length With Soldered Leads, Assemble On-Site<sup>1,2,3</sup>

- Specify **FLEXConfig-2**
- Specify FLEX type and channel type
- Specify run lengths
- IP68 only available in **FLEXConfig-2**
- If no config is specified, and run lengths are provided, **FLEXConfig-2** will be used

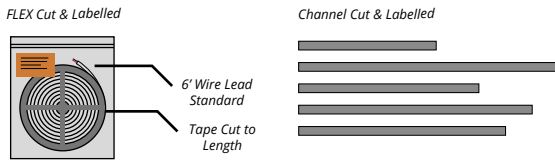

### ③ Pre-Assembled Factory Finished Fixtures<sup>1,2</sup>


- Specify **FLEXConfig-3**
- Fully assembled fixture
- ETL stamped and listed as a fixture
- 6.50' max length
- Standard 6' power lead unless otherwise specified
- The below channels **CANNOT** be factory assembled:
  - Slim:**
    - CHS-R-1208
    - CHS-R-1715
  - Wide:**
    - CHW-R-2010
    - CHW-S-2027
    - CHW-S-7532
    - CHW-S-2623
    - CHW-S-3030
    - CHW-S-3561

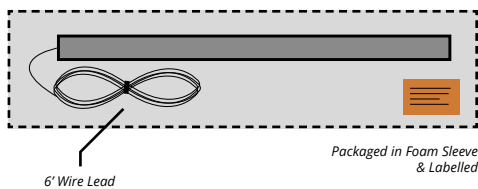

#### NOTES:

- Due to the nature of the FLEX DC® product, specific lengths may not fall exactly on a cutting point. In this case, Optic Arts® will always cut to the smaller dimension unless otherwise specified.
- Unless otherwise specified, channel is cut 15mm longer than FLEX DC®.
- Some on-site assembly required. See installation guides for details.

## COMPATIBLE DRIVERS

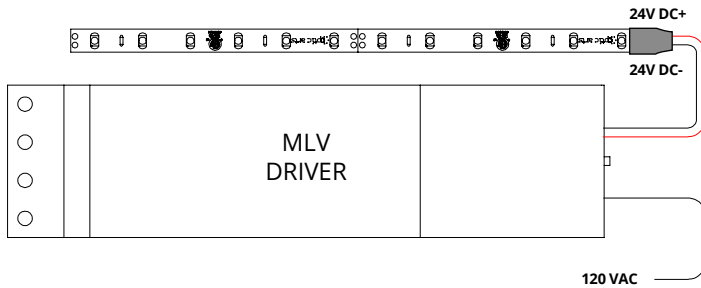

## MLV (MLV)

PART	DESCRIPTION
ML10S24VDC	10W 120VAC DIMMABLE DRIVER
ML20S24VDC	20W 120VAC DIMMABLE DRIVER
ML35S24VDC	35W 120VAC DIMMABLE DRIVER
ML35S24VDC-277	35W 277VAC DIMMABLE DRIVER
ML40S24VDC	40W 120VAC DIMMABLE DRIVER
ML50S24VDC	50W 120VAC DIMMABLE DRIVER
ML50S24VDC-277	50W 277VAC DIMMABLE DRIVER
ML60S24VDC	60W 120VAC DIMMABLE DRIVER
ML75S24VDC	75W 120VAC DIMMABLE DRIVER
ML75S24VDC-277	75W 277VAC DIMMABLE DRIVER
ML96S24VDC	96W 120VAC DIMMABLE DRIVER
ML96S24VDC-277	96W 120VAC DIMMABLE DRIVER
EM2-200S24DC	200W 120VAC DIMMABLE DRIVER, 2 96W CIRCUITS
EM3-300S24DC	300W 120VAC DIMMABLE DRIVER, 3 96W CIRCUITS
EM2-200S24DC-277	200W 120VAC DIMMABLE DRIVER, 2 96W CIRCUITS
EM3-300S24DC-277	288W 120VAC DIMMABLE DRIVER, 3 96W CIRCUITS


### DIMENSIONS

10W-50W	H 2.11"; W 7.38"; D 1.60"
60W-96W	H 3.93"; W 8.13"; D 1.59"
200-300W	H 5.69"; W 10.29"; D 3.13"

### DIMMING PERFORMANCE

MLV DRIVER Dims to 20% on most MLV dimmers

NOTE: Must be loaded between 75%-100% of rated load to maintain FLEX DC® warranty

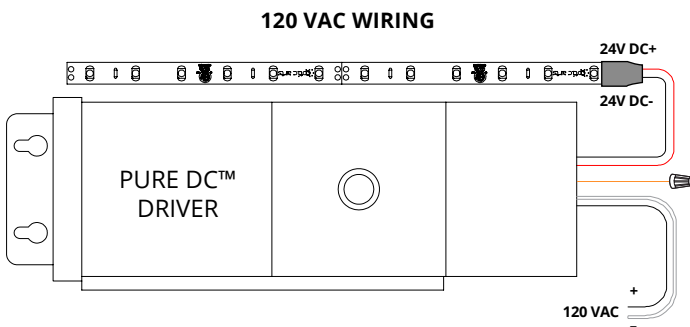

## PURE DC™ MLV (PDC)


PART	DESCRIPTION
PDC.40.24	40W 120/277VAC PURE DC™ MLV DIMMABLE DRIVER
PDC.96.24	96W 120/277VAC PURE DC™ MLV DIMMABLE DRIVER

### DIMENSIONS

40W	L 14.25"; W 3.00"; H 2.88"
96W	L 14.75"; W 4.31"; H 4.81"


### DIMMING PERFORMANCE

PURE DC™ DRIVER Dims to 0.1% on most MLV dimmers

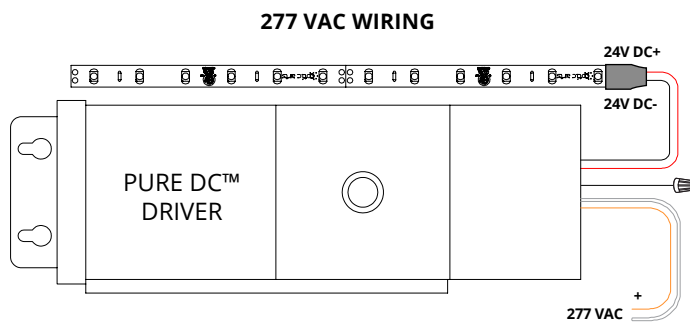




## COMPATIBLE DRIVERS

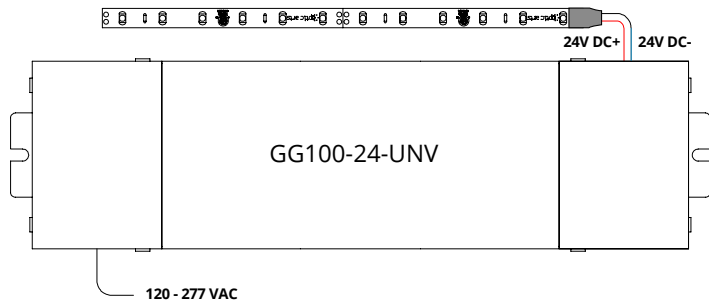

## ELECTRONIC DRIVER - NON-DIM (ND)

PART	DESCRIPTION
GG100E-24-UNV	96W 120-277VAC ELECTRONIC DRIVER
<b>DIMENSIONS</b>	
ELECTRONIC DRIVER	H 3.00"; W 11.46"; D 1.30"
<b>DIMMING PERFORMANCE</b>	
ELECTRONIC DRIVER	Non-Dim

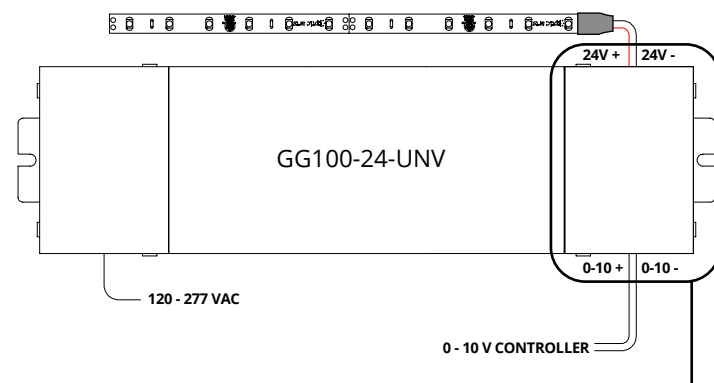


## ELECTRONIC DRIVER W/0-10V MODULE (010)


PART	DESCRIPTION
GG100E-24-UNV-010V	96W 120-277VAC ELECTRONIC DRIVER WITH 0-10V DIMMING MODULE (SINK)
<b>DIMENSIONS</b>	
ELECTRONIC DRIVER - 0-10V	H 3.00"; W 11.46"; D 1.30"
<b>DIMMING PERFORMANCE</b>	
ELECTRONIC DRIVER - 0-10V	Dims below 1% on most 0-10V dimmers

### FIELD INSTALLED IN LOW VOLTAGE WIRING COMPARTMENT

- Install DIM-010V Module in low voltage wiring compartment.
- Max number of 25 modules on one dimmer. Consult dimmer datasheet for maximum device limitation of a specific controller.

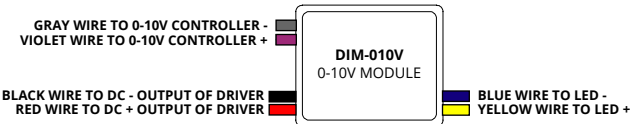

## COMPATIBLE DRIVERS

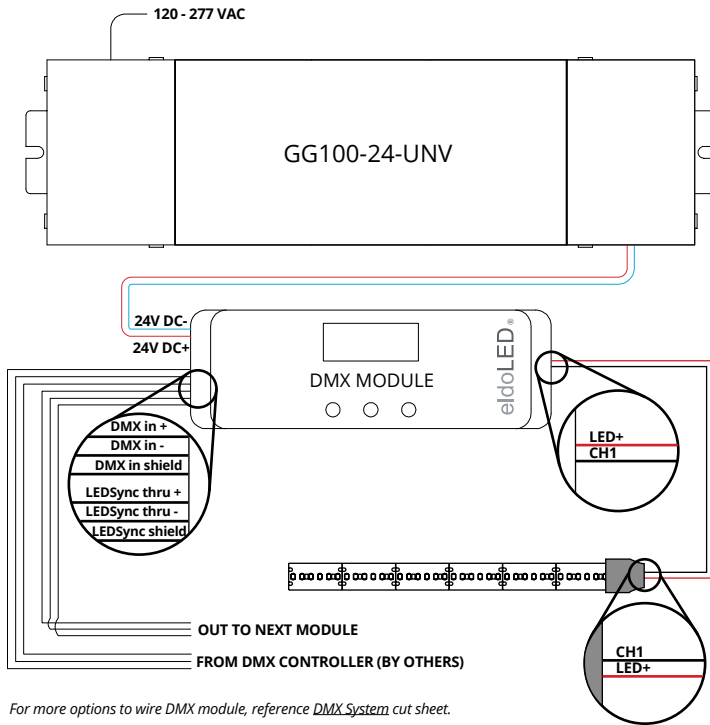

For more options to wire DMX module, reference [DMX System](#) cut sheet.

## ELECTRONIC DRIVER W/DMX MODULE (DMX)

PART	DESCRIPTION
GG100E-24-UNV-DMX	96W 120-277VAC ELECTRONIC DRIVER WITH eldoLED DMX DIMMING MODULE

### DIMENSIONS

96W	H 3.00"; W 11.46"; D 1.30"
DMX MODULE	H 1.97"; W 6.02"; D 0.91"


\*Must be installed in UL box (by others)

### DIMMING PERFORMANCE


ELECTRONIC DRIVER - DMX MODULE	Dims to 0.1% on most DMX systems
--------------------------------	----------------------------------

COMPATIBLE DRIVERS

### DIMMER WITH NEUTRAL

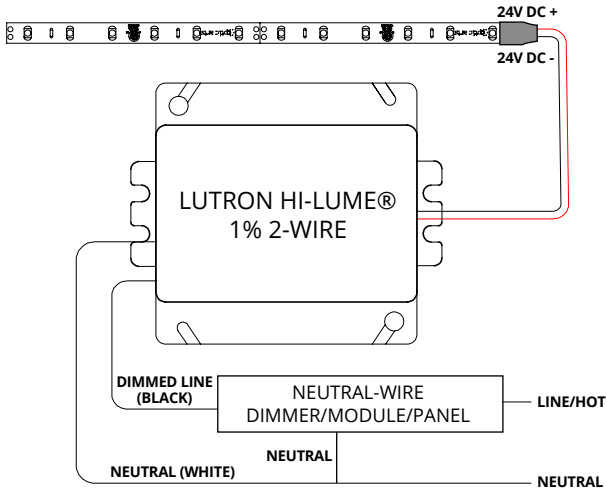

### DIMMER WITHOUT NEUTRAL

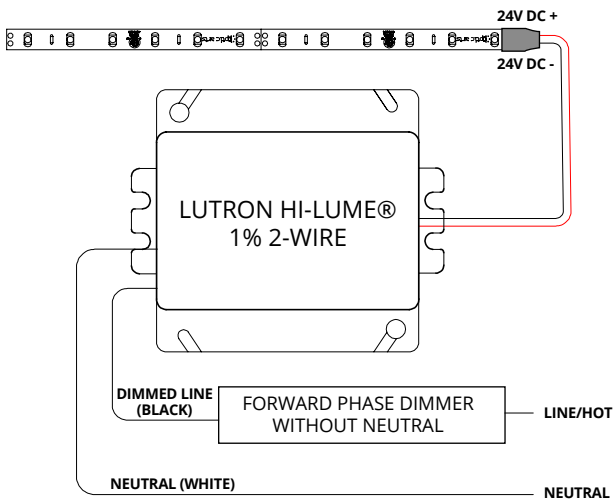


### LUTRON HI-LUME® 1% 2-WIRE: 2-WIRE CONTROL FORWARD PHASE




PART	DESCRIPTION
LTEA4U1UKL-CV240	5-40W, 120VAC, 2-WIRE FORWARD PHASE DRIVER
DIMENSIONS	
HI-LUME® 1% 2-WIRE	H 4.00"; W 4.89"; D 2.62"
DIMMING PERFORMANCE	
LUTRON HI-LUME® 1% 2-WIRE	Dims to 1% with compatible Lutron controls

COMPATIBLE DRIVERS

### 3-WIRE

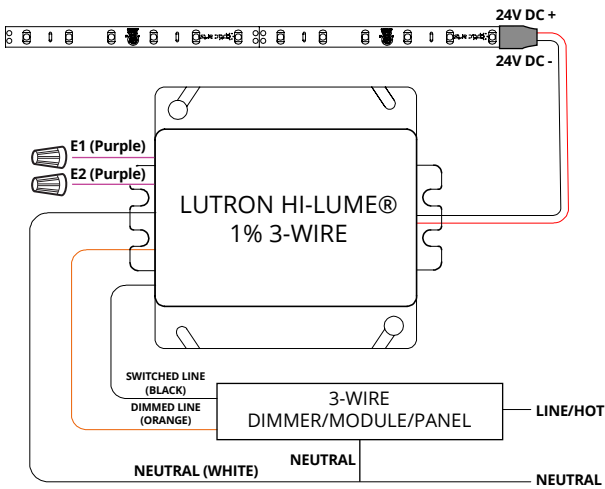

### ECOSYSTEM

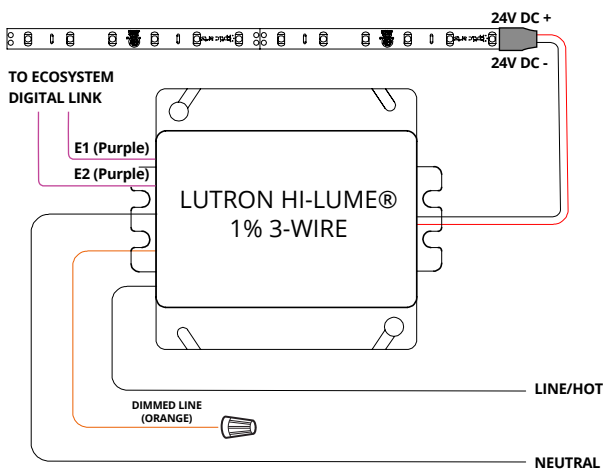


### LUTRON HI-LUME® 1%: 3-WIRE/ECOSYSTEM



PART	DESCRIPTION
L3DA4U1UKL-CV240	5-40W, 120-277VAC, 3-WIRE/ECOSYSTEM DRIVER
DIMENSIONS	
HI-LUME® 1%	H 4.00"; W 4.89"; D 2.62"
DIMMING PERFORMANCE	
LUTRON HI-LUME® 1% 3-WIRE/ECOSYSTEM	Dims to 1% with compatible Lutron controls

COMPATIBLE DRIVERS

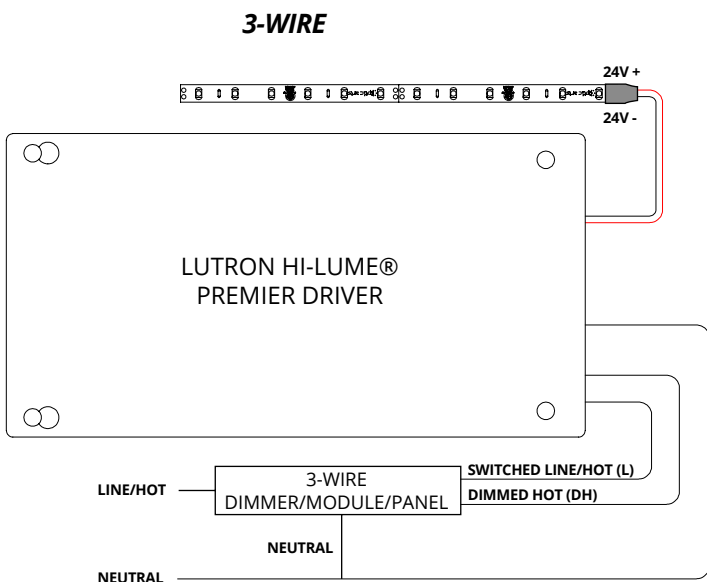

**LUTRON HI-LUME® PREMIER:**  
3-WIRE/ECOSYSTEM



PART	DESCRIPTION
L3D0-96W24V-U	2-96W, 120-277VAC, 3-WIRE/ECOSYSTEM DRIVER

DIMENSIONS	
HI-LUME® PREMIER	H 5.5"; W 10.5"; D 2.0"

DIMMING PERFORMANCE	
LUTRON HI-LUME® PREMIER	Dims to 0.1% with compatible Lutron controls

NOTE: Lutron soft-on, fade to black technology available with Ecosystem Digital Control only.

