

# LETO 11 UD Adjustable

PENDANT LED UPLIGHT AND ADJUSTABLE DOWNLIGHT



## Leto 11 UD Adjustable - Uplight and Downlight Pendant LED Light.

LETO 11 UD's unique design gives it the utility of a powerful downlight with the aesthetic quality of accent uplight.

## Ordering Code

Fixture	<b>892</b>							
	1	2	3	4	5	6	7	8
Driver							--	--
	1	2	3	4	5	6	7	8

## Product Specifications

**SAMPLE:** Fixture **892 - A90 - 61017 - 27 - 0707 - 00 - 08 - 08** | Driver **952 - 01 - 01 - STD - 120 - A90 - 0707**

1 - Model	2 - LED	3 - Optic		4 - CCT	5 - Lumen	6 - Accessory*2
<b>892</b> · Leto 11 UD Adjustable	<b>A90</b> · 93+ CRI Accuracy	<i>Down</i>	<i>Up</i>	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<i>Direct / Indirect</i> <b>0707</b> · 700/700 <b>1010</b> · 1000/1000 <b>1515</b> · 1500/1500  <small>For other direct / indirect possibilities please contact factory team</small>	<b>00</b> · No Accessory <b>DL</b> · Diffusing Foil <b>HO</b> · Honeycomb <b>SL</b> · Solite Lens
		<b>610</b> · 10° TIR*1	<b>17</b> · 17°			
		<b>618</b> · 18°	<b>24</b> · 24°			
		<b>630</b> · 30°	<b>60</b> · 60°			
		<b>645</b> · 45°				
		<b>660</b> · 60°				
					<small>Wattage on page 3</small>	

7 - Body Color		8 - Baffle Color		1 - Canopy Style	2 - Canopy Color		3 - Suspension (6' incl.)
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	<b>951</b> · Round <b>951F</b> · Round Flangeless*5 <b>952</b> · Square	<i>Standard</i>	<i>Premium</i>	<b>02</b> · 2 Aircraft + Feed Cable <b>05</b> · 2 Powered Aircraft*3  <small>Contact Senso for custom length</small>
<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL		<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	

4 - Suspension Color	5 - Driver		6 - Voltage	7 - LED	8 - Lumen
<b>00</b> · None*3 <b>01</b> · White <b>02</b> · Black <b>03</b> · Clear <b>XX</b> · Custom	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase*4 <b>ELDOLC</b> · EldoLED 0 - 10 Volt*5 <b>DALI</b> · Dali Protocol*5	Dim Level N/A 1% 1% 0.1% 0.1%	<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V*5/7	Same as Fixture	Same as Fixture
	<b>LUTES</b> · Hilume Ecodigital*5 <b>DMX</b> · SENSO*5 <b>EMG</b> · Emergency Driver*5/6 <b>CSMB</b> · Casambi Wireless Control*5/6	Dim Level 1%			

\*1 TIR 2000lm MAX

\*2 available on downlight only

\*3 no feed cable color option for **05** - 2 Powered Aircraft

\*4 120V only

\*5 remote mount driver

\*6 second driver required

\*7 not available with ELDO, Lutron or DMX

# LETO 11 UD Adjustable



PENDANT LED UPLIGHT AND ADJUSTABLE DOWNLIGHT

## Canopy / Suspension

**Round Canopy:** W - Ø5.17" [131.24 mm] / H - 2.36" [60mm]

Drivers mounted in the Round Canopy: **STD, LCS, DIM**

Drivers remote mounted: **ELDOLC, DALI, LUTES, DMX, EMG, CSMB**

**Square Canopy:** W/L - 5.67" [144mm] / H - 2.28" [58mm]


Drivers mounted in the Square Canopy: **STD, LCS, DIM, ELDOLC, DALI, LUTES**

Drivers remote mounted: **DMX, EMG, CSMB**


**Round Flangless:** W - Ø2.53" [64.25 mm]

All drivers remote mount

2 Aircraft Cable  
w/ Feed Cable



2 Powered  
Aircraft Cable



## Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector



## Accessories

Diffusing Lens



Honeycomb Mesh



Solite Lens






## Installation

- The included canopy fits on a standard junction box
- Height adjustable dual-aircraft cable included
- Electrical feed cable included
- 360 degree rotation with up to 30 degrees of tilt

## Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

## Dimensions

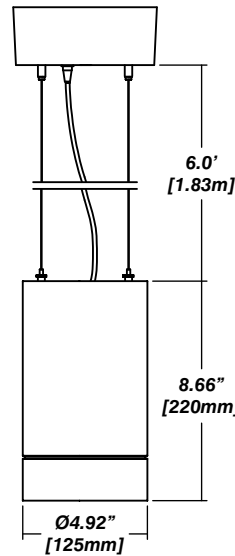

# LETO 11 UD Adjustable



PENDANT LED UPLIGHT AND ADJUSTABLE DOWNLIGHT

## Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See [Sensolighting.com](http://Sensolighting.com) for more information.

*\*Full photometric Reports and IES files available for every configuration*

## Color Metrics

### TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

*\*Full Color Metric Info Available at [Sensolighting.com](http://Sensolighting.com)*

## LED Module Performance

**Output:** Up to 104 lumen/Watt

**Efficacy:** Color consistency within a 3-MacAdam Ellipse

**CCT:** 2500K - 6500K

**Color Rendering:** 93+ CRI

**Min. R Values:** R<sup>9</sup> - 60 R<sup>1</sup> - 90 R<sup>9</sup> - 100

## Driver and Power Consumption

**Dimming:** 1% dimming standard with 0.1% option  
Casambi wireless control available

**Ripple:** Industry leading Low ripple

**Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety

**Installation:** Remote mounted

Lumen Option	700/700	1000/1000	1500/1500
Fixture Wattage	12.2W	18.2W	30W
Delivered Lumen	1270lm	1851lm	2810lm

## Leto Light Distribution: Reflector

